


TRUE FLATSTRAP

PRODUCT DATA:

- Designation: FS(Width)-Mil
 - Ex: FS200-30
- Stock widths: 2", 4", 6", 8" 10"
- Custom Widths are available in increments of even inches
- Length: 10', 12', 14', 16', 18', 20', 22', & 24' (custom lengths available in 1' increments)
 - Note: 16' through 24' length will have additional packaging costs
 - 10 piece minimum order quantities must be strictly followed for 16' & longer lengths in order to package, ship, & handle safely
- Gauges:
 - 33KSI: 25, 22, 20, 20S & 18 gauge
 - 50KSI: 20S, 22, 16, 14 & 12 gauge
- Cut off angle: 90°, 45°, 40°, 35°, 30°, 25°, 20°, 15°, 10°, 5°
- Available in smooth (2"-10") and knurled textures from (2" - 8").
 - The knurled finish helps start a screw
- Coating:
 - Drywall: Standard G-40 Hot Dipped Galvanized. Also Available in G-60 and G-90
 - Structural: G-60 Hot Dipped Galvanized. Also Available in G-60 and G-90
- Meets applicable ASTM's for Structural and Drywall applications:
 - ASTM- A1003, A-653, A924, C-645, C754, C955, C1007

- Factory pre-cut angled ends in 5° increments
- Embossed knurled pattern to make it easier to start a screw
- Longer lengths available

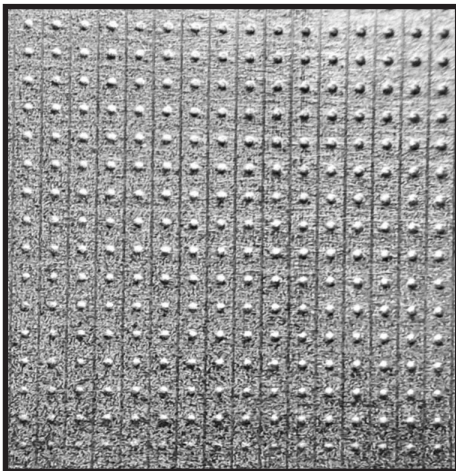

Knurled pattern for better screw starting.

