

VERSADRY


DRYWALL TRACK

A SIMPLE SOLUTION WITH A BIG IMPACT



FROM THE LEADER IN METAL FRAMING INNOVATION

www.BuildStrong.com | 866-372-6384

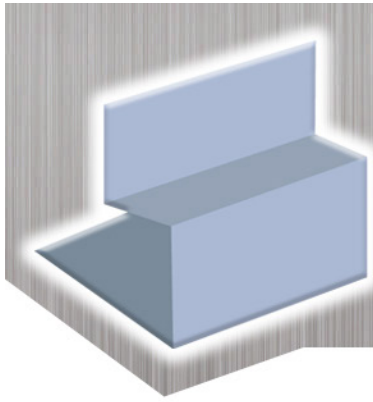

VERSADRY

DRYWALL TRACK



Patented system allows the installation of drywall to sit 2 inches off the floor on a steel shelf. This shelf mitigates the wicking of water both during construction and the life of the building.



INNOVATION, SERVICE, QUALITY


www.BuildStrong.com • 1-866-372-6384





VERSADRY
DRYWALL TRACK

Wall Damage without VersaDry



VERSADRY
DRYWALL TRACK

Wall with VersaDry



IMPROVED AESTHETICS


Wall damage is mitigated with VersaDry Technology. The damage created by gypsum in close contact with water and moisture on the floor is a thing of the past.



INNOVATION, SERVICE, QUALITY


www.BuildStrong.com • 1-866-372-6384





VERSADRY
DRYWALL TRACK

**ELEGANT
FINAL FIT
& FINISHED
APPEARANCE**

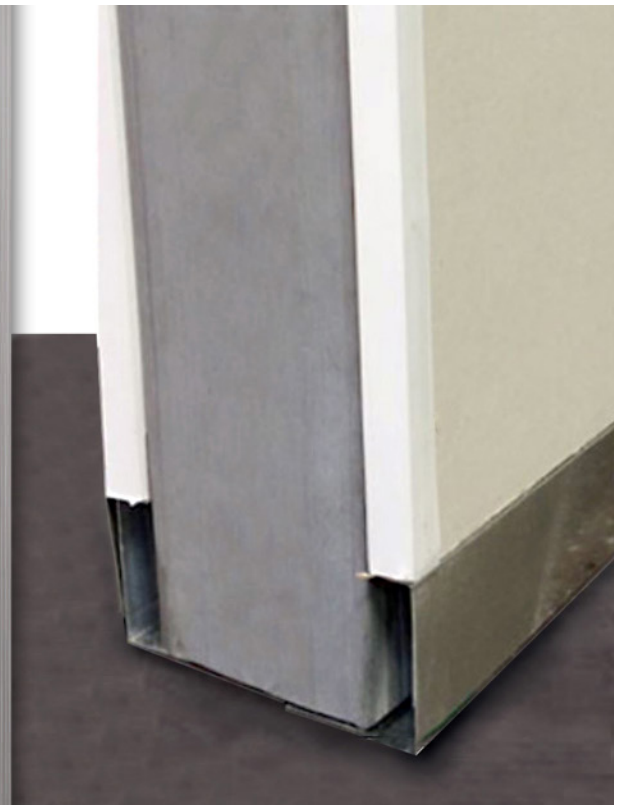

VERSADRY
DRYWALL TRACK


**PREVENTS BASEBOARD
DAMAGE FROM FLOOR
CLEANING EQUIPMENT**



INNOVATION, SERVICE, QUALITY


www.BuildStrong.com • 1-866-372-6384





VERSADRY
DRYWALL TRACK

**ELIMINATES THE NEED FOR
FIRE AND SOUND CAULK FOR
A COST AND LABOR SAVINGS
(FOR MOST APPLICATIONS)**



VERSADRY
DRYWALL TRACK

**IMPROVED
FIRE
RESISTANCE**



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384





VERSADRY
DRYWALL TRACK

**HELPS REDUCE
MOLD GROWTH**



VERSADRY
DRYWALL TRACK


**IMPROVED
ACOUSTICAL
PERFORMANCE**



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384





VERSADRY


DRYWALL TRACK

VERSADRY DRYWALL TRACK SYSTEM

Patented system allows the installation of drywall to sit 2 inches off the floor on a steel shelf. This shelf mitigates the wicking of water both during construction and the life of the building.



VERSADRY TRACK PROTECTS DRYWALL FROM WATER DAMAGE

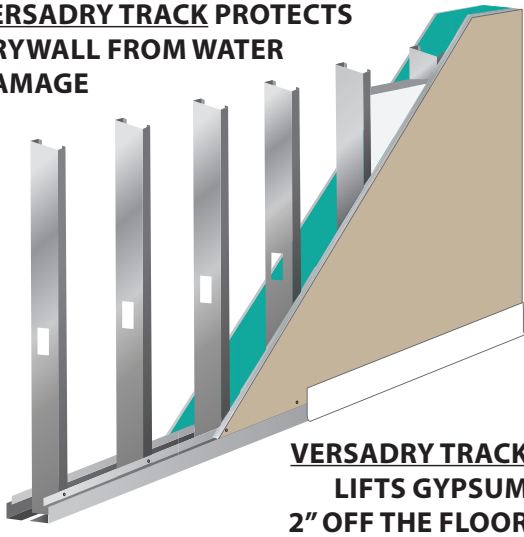

VERSADRY TRACK LIFTS GYPSUM 2" OFF THE FLOOR

Wall damage *without* VersaDry



IMPROVED AESTHETICS

Unsightly wall damage is mitigated with VersaDry Technology. The damage created by gypsum in close contact with water and moisture on the floor is a thing of the past.



VERSADRY TRACK: 2 PIECE DESIGN

Thickness Nomenclature	Non-Rate Length	1 Hour Rated	2 Hour Rated	Min Base Metal Thickness (in)	Design Thickness (in)	Min Yield Strength (ksi)	Standard Galvanization	Web Sizes (in)
VDT2-18	24'	10'	10'	0.0179"	0.0186"	33 ksi	G40	2 piece design. Any web size is possible
VDT2-30	12'	N/A	N/A	0.0296"	0.0312"			

VERSADRY TRACK: 1 PIECE DESIGN

Thickness Nomenclature	Non-Rate Length	1 Hour Rated	2 Hr Rated	Min Base Metal Thickness (in)	Design Thickness (in)	Min Yield Strength (ksi)	Standard Galvanization	Web Sizes (in)
VDT1-18	12' & 10' Press Brake	Coming Soon	Coming Soon	0.0179"	0.0186"	33 ksi	G40	3-5/8", 4", 5.5", 6"
VDT1-30				0.0296"	0.0312"			

VERSADRY DIMENSIONS

	Gypsum Ledge Height	Gypsum Ledge Width
Non-Rated	2.00"	0.688"
1 Hour Fire Rated	2.00"	0.688"
2 Hour Fire Rated	2.00"	1.295"

- **KEEPS GYPSUM DRY**
- **IMPROVED FIRE RESISTANCE**
- **IMPROVED ACOUSTICAL PERFORMANCE**
- **ELEGANT FINAL FIT AND FINISHED APPEARANCE**
- **HELPS REDUCE MOLD GROWTH**

VERSADRY TRACK CERTIFICATIONS:


FIRE RESISTANCE:

- NO CAULK NEEDED!**
- 3rd party tested to meet a 1 hour & 2 hour Fire Rating for UL Wall Design U423 per ASTM E119
 - 1 hour Fire Rating for UL Wall Design U423 per ASTM E119 with 18mil VersaDry Track, 1 layer of 5/8" Type X Gypsum, & 20ga 3-5/8" studs spaced 16"OC.
 - 2 hour Fire Rating for UL Wall Design U423 per ASTM E119 with 18mil VersaDry Track, 2 layers of 5/8" Type X Gypsum, & 20ga 3-5/8" studs spaced 16"OC.

ACOUSTICAL PERFORMANCE:

- 3rd part tested per ASTM E90-09 and calculated per ASTM E413-16.
- STC = 45 for Non-Fire Rated 18mil VersaDry Track w/ 1 layer of 5/8" Type X Gypsum
- STC = 48 for Non-Fire Rated 18mil VersaDry Track w/ 1 layer of Impact Resistant Gypsum

CLICK HERE TO WATCH THE VIDEO



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384





VERSADRY






DRYWALL TRACK

VERSADRY DRYWALL TRACK SYSTEM


Patented system allows the installation of drywall to sit 2 inches off the floor on a steel shelf. This shelf mitigates the wicking of water both during construction and the life of the building.




2-PIECE DESIGN
NOW AVAILABLE

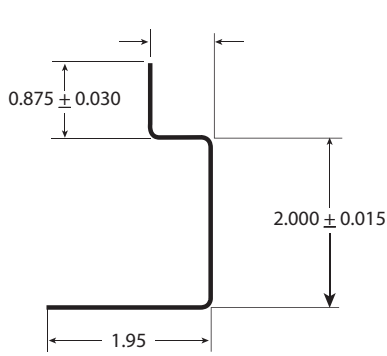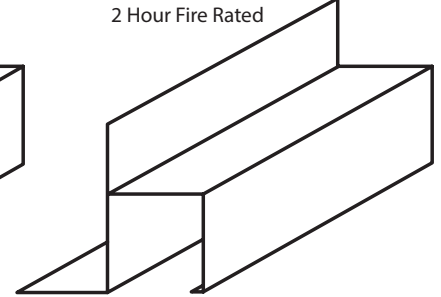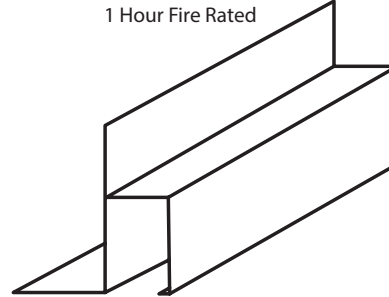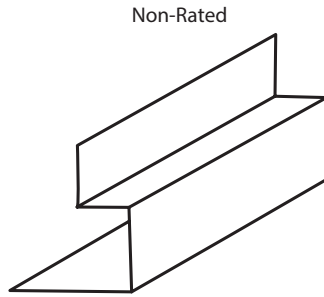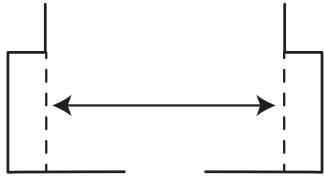

Non-Rated
195-NRVDT2

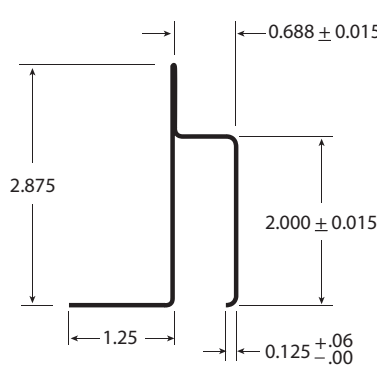

1 Hour Fire Rated
125-1HRVDT2

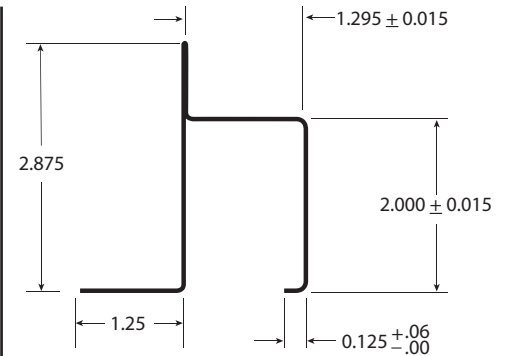

2 Hour Fire Rated
125-2HRVDT2


1-PIECE DESIGN




1 layer of Gypsum on 2 sides
NRVDT1



1 layer of Gypsum on 1 side

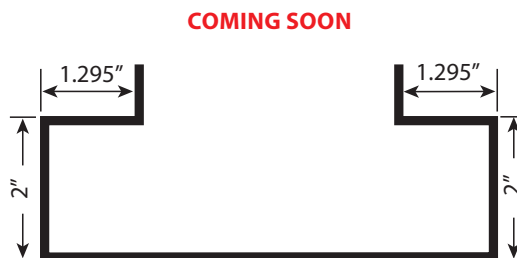

2 layers of Gypsum on 2 sides

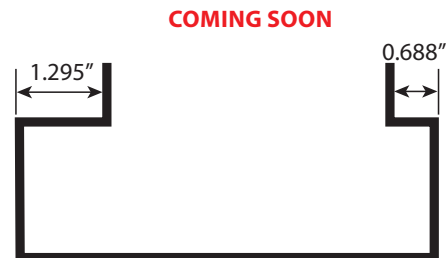

2 layers of Gypsum on 1 side
1 layer of Gypsum opposite side



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384

