VERSADRY

DRYWALL TRACK

A SIMPLE SOLUTION WITH A BIG IMPACT






TELLING

MADE IN THE USA






FROM THE LEADER IN METAL FRAMING INNOVATION

www.BuildStrong.com

VERSADRY
DRYWALL TRACK

WHY VERSADRY?


- KEEPS GYPSUM DRY
- IMPROVED FIRE RESISTANCE WITHOUT CAULK
- IMPROVED ACOUSTICAL PERFORMANCE
- ELEGANT FINAL FIT AND FINISHED APPEARANCE
- HELPS REDUCE MOLD GROWTH

VersaDry track is a proven product which changes the way we do construction with far reaching benefits. It helps eliminate the extreme wastefulness of gypsum board on the job site by solving the problem of mold growth proliferation and moisture damage in drywall construction.

The current method of installing drywall 5/8 of an inch off the floor and then smoke/fire caulking the void is not effective in stopping the wicking of water, it is extremely costly, and it leaves an aesthetically undesirable finish

Benefits include:


- 10% waste factor is drastically reduced
- Schedule improves without constant remediation
- Designed 8' walls can be built 8' with room for ceiling track: not 9' or 10'
- No 5/8" void to caulk at the floor: HUGE SAVINGS! Anywhere from $1.50 LF to $6.00 LF on rated partitions

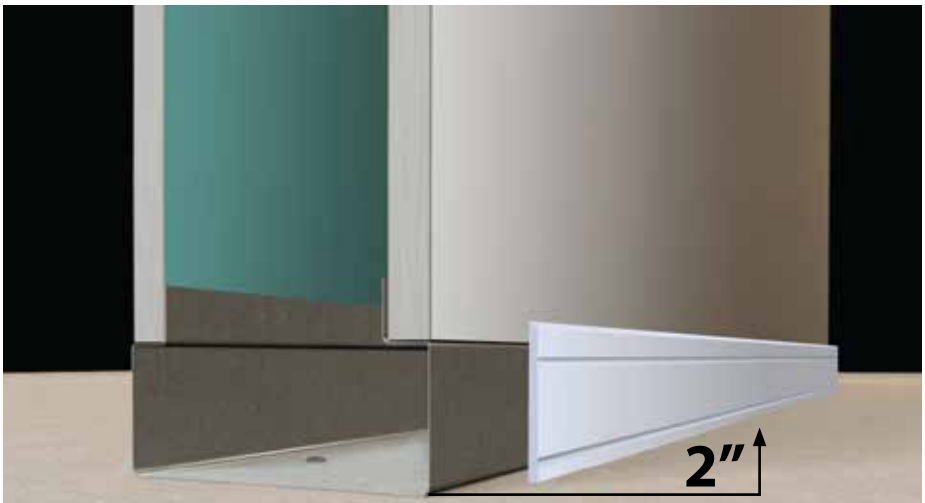

VersaDry protects against moisture damage and mold growth by lifting gypsum board 2" off the floor.

VERSADRY
DRYWALL TRACK

WHY VERSADRY?

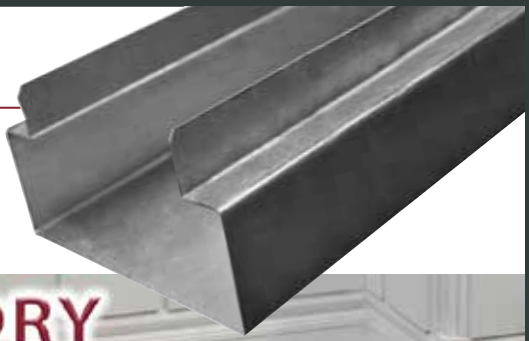



IMPROVED AESTHETICS

Wall damage is mitigated with VersaDry Technology. The damage created by gypsum in close contact with water and moisture on the floor is a thing of the past.





VERSADRY TRACK: 1 PIECE DESIGN (Ideal for new construction) US PATENT 12,428,837

Thickness Nomenclature	Non-Rate Length	1 Hour Rated + Clip	2 Hour Rated + Clip	Min Base Metal Thickness (in)	Design Thickness (in)	Min Yield Strength (ksi)	Standard Galvanization	Web Sizes (in)
VDT1-18	Max 24′	Max 24′ Length (10′ Recommended)		0.0179″	0.0186″	33 ksi	G40	3-5/8″, 4″, 5.5″, 6″
VDT1-30				0.0296″	0.0312″			

VERSADRY TRACK: 2 PIECE DESIGN (Ideal for retrofits) US PATENT 8,596,019 | 10,487,497

Thickness Nomenclature	Non-Rate Length	1 Hour Rated	2 Hour Rated	Min Base Metal Thickness (in)	Design Thickness (in)	Min Yield Strength (ksi)	Standard Galvanization	Web Sizes (in)
VDT2-18	24′	10′	10′	0.0179″	0.0186″	33 ksi	G40	2 piece design. Any web size is possible
VDT2-30	12′	N/A	N/A	0.0296″	0.0312″			

VERSADRY DIMENSIONS

	Gypsum Ledge Height	Gypsum Ledge Width
Non-Rated	2.00″	0.688″
1 Hour Fire Rated	2.00″	0.688″
2 Hour Fire Rated	2.00″	1.295″

- **KEEPS GYPSUM DRY**
- **IMPROVED FIRE RESISTANCE WITHOUT CAULK**
- **IMPROVED ACOUSTICAL PERFORMANCE**
- **ELEGANT FINAL FIT AND FINISHED APPEARANCE**
- **HELPS REDUCE MOLD GROWTH**

VERSADRY TRACK CERTIFICATIONS:



Independent accredited 3rd party tested per ASTM E119, consistent with the UL Wall Design U423 construction, to meet a 1 hour & 2 hour Fire Rating without caulk.

- The tested 1 hour fire rated wall construction consisted of: 18mil VersaDry Track, VersaDry Fire Clips, 1 layer of 5/8″ Type X Gypsum, & 20ga 3-5/8″ studs spaced 16″OC
- The tested 2 hour fire rated wall construction consisted of: 18mil Versadry Track, VersaDry Fire Clips, 2 layers of 5/8″ Type X Gypsum, & 20ga 3-5/8″ studs spaced 16″OC
- Versadry 1 piece design with clip at floor & ceiling passed ASTM E119 1-hour and 2-hour fire and hose stream test without caulk at Intertek certified independent 3rd party test lab.


3rd part tested per ASTM E90-09 and calculated per ASTM E413-16.

- STC = 45 for Non-Fire Rated 18mil VersaDry Track w/ 1 layer of 5/8″ Type X Gypsum
- STC = 48 for Non-Fire Rated 18mil VersaDry Track w/ 1 layer of Impact Resistant Gypsum
- STC = 46 for 1 hour Fire Rated 18mil VersaDry Track w/ 1 layer of Impact Resistant Gypsum
- STC = 53 for 2 hour Fire Rated 18mil VersaDry Track w/ 2 layers of 5/8″ Type X Gypsum






1-PIECE DESIGN

Non-fire rated design	Non-fire rated design	Non-Fire rated design	Non-Fire rated design
			
1 layer of Gypsum on 1 side	2 layers of Gypsum on 1 side 1 layer of Gypsum on opposite side	1 layer of Gypsum on 2 sides	2 layers of Gypsum on 2 sides





VersaDry with Clip Assembly - US PATENT 12,428,837


VersaDry Clip - US Patent 2026-0015858

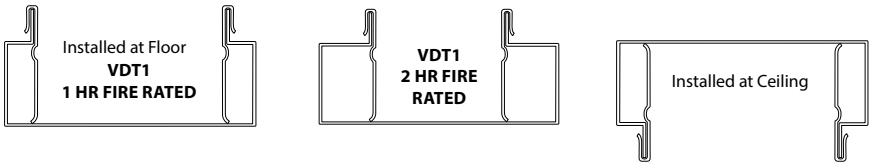

VersaDry with clip at floor or ceiling without caulk

US PATENT 8,596,019 **2-PIECE DESIGN** US PATENT 10,487,497

	2-Piece Design	1-Hour Fire Rated	2-Hour Fire Rated
			
195-NRVDT2	**125-1HRVDT2**		**125-2HRVDT2**

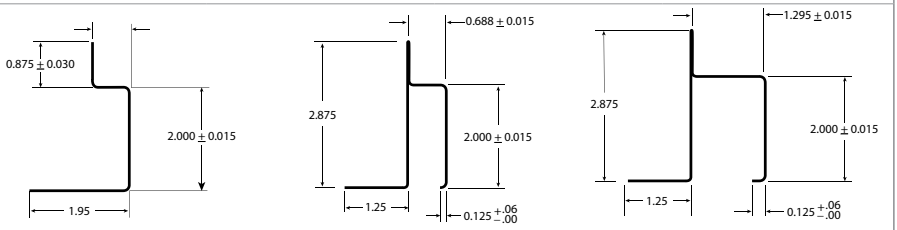

BENEFITS




VERSADRY
DRYWALL TRACK
REDUCES BASEBOARD
DAMAGE FROM FLOOR
CLEANING EQUIPMENT


VERSADRY
DRYWALL TRACK
ELEGANT
FINAL FIT
& FINISHED
APPEARANCE

THE IDEAL METAL FRAMING SOLUTION FOR:














AND MORE!

TELLING

THE LEADER IN METAL FRAMING INNOVATION

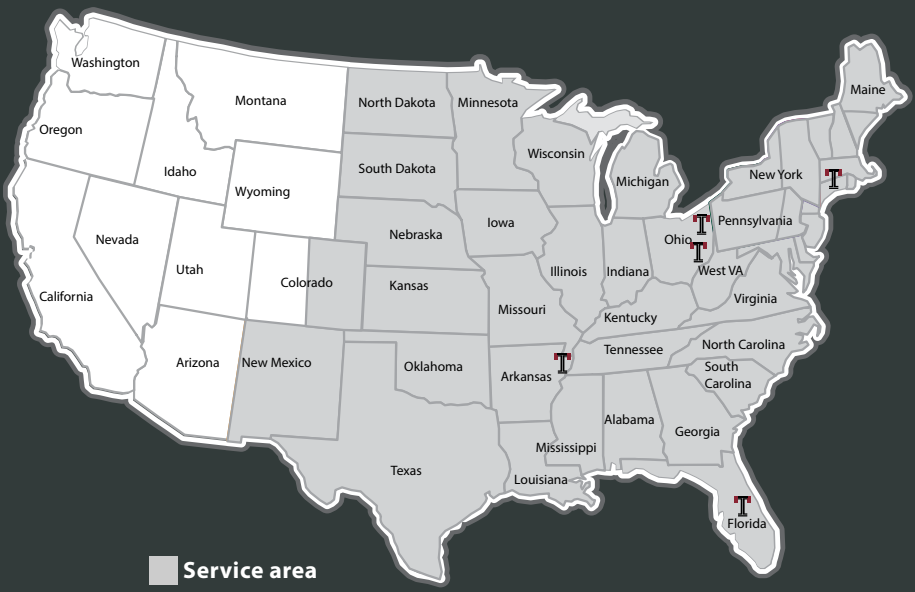

CORPORATE HEADQUARTERS
4420 Sherwin Road
Willoughby, OH 44094

Phone:	Toll Free:
440-974-3370	866-372-6384

Fax: 440-974-3408
E-mail: sales.corp@tellingindustries.com

MIDWEST FACILITY
2105 Larrick Road
Cambridge, OH 43725

Phone:	Toll Free:
740-435-8900	866-372-6384

Fax: 740-435-8915
E-mail: sales.oh@tellingindustries.com

MIDSOUTH FACILITY
1400 Southwire Drive
Osceola, AR 72370

Phone:	Toll Free:
870-563-6065	888-711-3124

Fax: 870-563-2470
E-mail: sales.coar@tellingindustries.com

NORTHEAST FACILITY
1050 Kennedy Road
Windsor, CT 06095

Toll Free:	Fax:
866-372-6384	440-974-3408

E-mail: sales.corp@tellingindustries.com

SOUTHEAST FACILITY
1200 W Martin Luther King BLVD
Plant City, FL 33563

Phone:	Toll Free:
440-974-3370	866-372-6384

Fax: 440-974-3408
E-mail: sales.corp@tellingindustries.com

Innovative, Responsive Solutions for All Your Metal Framing Needs
www.buildstrong.com • 1-866-372-6384

Updated 3-4-26