



SLOTTED TRACK



WHAT IS T-SLOTTED TRACK - HEAD OF WALL DEFLECTION SYSTEM?

T-Slotted Track is the industry preferred system for achieving head-of-wall deflection and fire resistance for interior and exterior walls. It meets movement and cycling requirements for ANSI/UL 2079 and is UL Classified for 1, 2, 3, and 4 hour fire-resistant ratings in head-of-wall fire-rated joint systems.

BENEFITS


- Fire-rated deflection system
- UL Classified in over 80 approved fire-rated systems
- Standard Slotted Track allows vertical movement
- Custom web, leg and lengths are available
(Custom slot sizes are not available)
- IAMPO 0283 approved
- Positive attachment provided for wall strength
- Absorbs head-of-wall and floor extension or compression movement
- Integrated with traditional wall systems
- Easy installation reduces labor costs

SEE THE VIDEO




Telling Slotted Track is listed in many gypsum based UL Wall Designs utilizing 0.030" material or thicker for Studs with a web ranging from 2.5" to 8.0".

2.5" SLOTTED TRACK

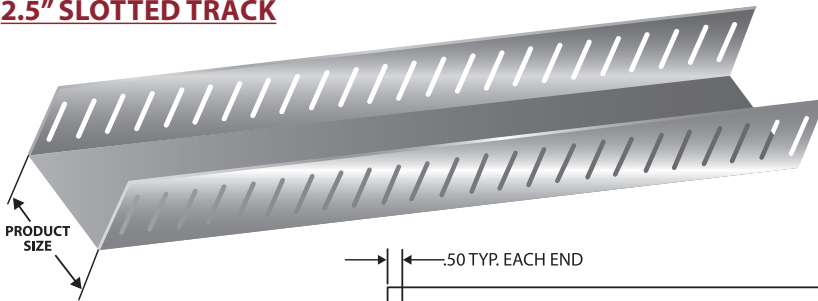

- IAPMO UES Evaluation Report 0283 documents Telling's Slotted Track meets the 2018, 2015, & 2012 International Building Code standards

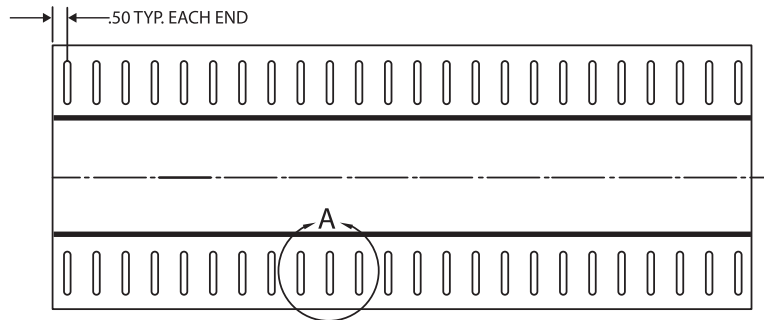


30 EQD SLOTTED TRACK
Another Innovation
From Telling Industries!

PRODUCT SIZES:

MAX WEB: 8"
FLANGE: 2.5"



MATERIAL GAUGES:

.0235" MINIMUM
.071" MAXIMUM



DETAIL A
SCALE 2 : 3

3" SLOTTED TRACK

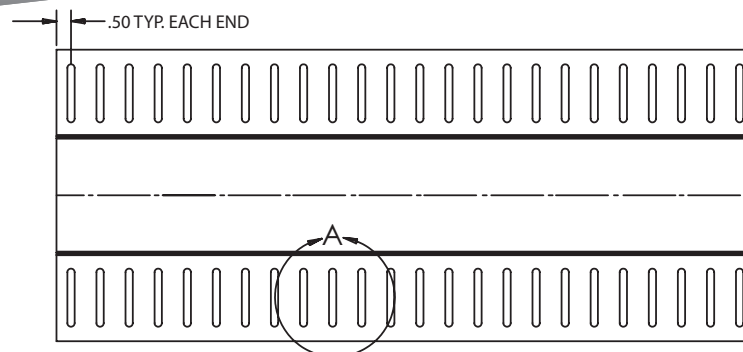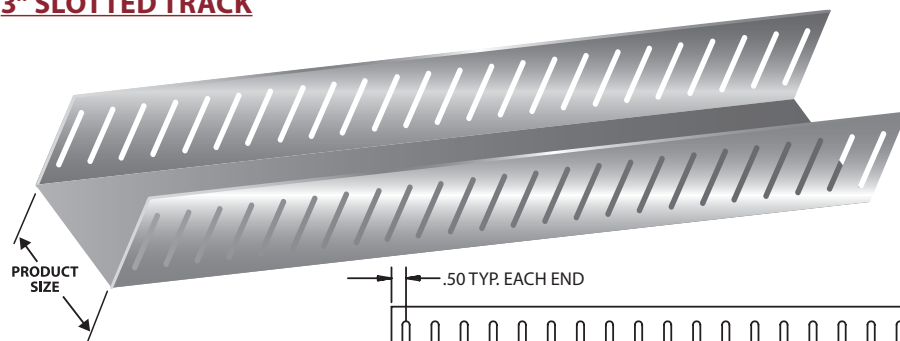


PRODUCT SIZES:

MAX WEB: 8"
FLANGE: 3"

MATERIAL GAUGES:

.030" MINIMUM
.054" MAXIMUM



DETAIL A
SCALE 2 : 3



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384





CUSTOM SLOTTED TRACK



**NON
STRUCTURAL**

CUSTOM SLOTTED TRACK: Telling custom slotted track is available in 16ga, 18ga, 30 mil, 33 mil and 30 EQD. With available custom slot locations, custom leg length and custom right angles with slots.


CUSTOM SLOTTED TRACK PRODUCT OFFERING:

Nomenclature	Web width	Leg 1 Length	Leg 2 Length	Slot Size	Slot Location	Steel Gauge	Design Thickness
362TATC300-537T-30	3-5/8"	3.0"	5-3/8"	2.0"	0.5" from leading edge (top)	30 mil	0.0312"
362TATC300-537M-30					middle of long leg		
362TATC300-537B-30					0.5" from web to leg bend (bottom)		
Custom					0.5" from leading edge (top) middle of long leg 0.5" from web to leg bend (bottom)	16 ga, 18 ga, 33 mil	0.0566" to 0.0312"
400TATC300-500T-30	4.0"	3.0"	5.0"	2.0"	0.5" from leading edge (top)	30 mil	0.0312"
400TATC300-500M-30					middle of long leg		
400TATC300-500B-30					0.5" from web to leg bend (bottom)		
Custom					0.5" from leading edge (top) middle of long leg 0.5" from web to leg bend (bottom)	16 ga, 18 ga, 33 mil	0.0566" to 0.0312"

Slots 0.5" from leading edge (top)

Slots middle of long leg

Slots 0.5" from leading edge (bottom)

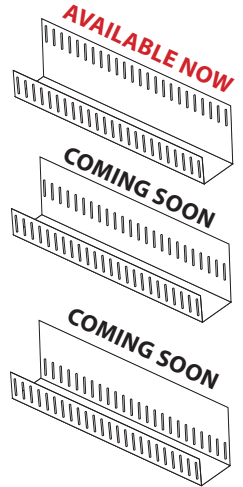

Custom Slotted Track TATC Limitations:

- 12" max strip width
- The smallest Leg size is 3" to fit the 2" slot and leave 0.5" on each side of it
- The slots must be punched a minimum of 0.5" from the leading edge or a bend
- Slots will be top, centered, & bottom for slotted track
- Max length is 12'
- Gauges: 16ga, 18ga, 33mil, 30mil, & 30EQD


CUSTOM SLOTTED RIGHT ANGLE PRODUCT OFFERING:

Nomenclature	RA Size	Leg 1 Length	Leg 2 Length	Slot Size	Slot Location	Steel Gauge	Design Thickness
RAC-300x500T-30	5"x3"	3.0"	5.0"	2.0"	0.5" from leading edge (top)	30 mil	0.0312"
RAC-300x500M-30					middle of long leg		
RAC-300x500B-30					0.5" from web to leg bend (bottom)		
Custom					0.5" from leading edge (top) middle of long leg 0.5" from web to leg bend (bottom)	16 ga, 18 ga, 33 mil	0.0566" to 0.0312"
RAC-300x400T-30	4"x3"	3.0"	4.0"	2.0"	0.5" from leading edge (top)	30 mil	0.0312"
RAC-300x400M-30					middle of long leg		
RAC-300x400B-30					0.5" from web to leg bend (bottom)		
Custom					0.5" from leading edge (top) middle of long leg 0.5" from web to leg bend (bottom)	16 ga, 18 ga, 33 mil	0.0566" to 0.0312"

Slots 0.5" from leading edge (top)

Slots middle of long leg

Slots 0.5" from leading edge (bottom)

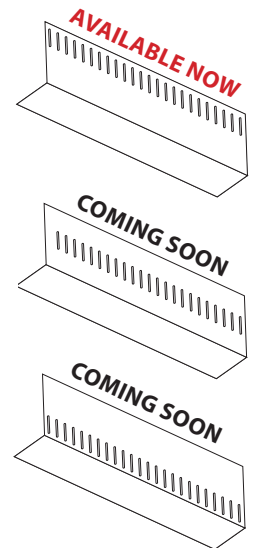

Custom Right Angle RAC Limitations:

- 12" max strip width
- The smallest leg size with a slot is 3" to fit the 2" slot and leave 0.5" on each side of it
- The smallest leg size without a slot is 5/8"
- The slots must be punched a minimum of 0.5" from the leading edge or a bend
- Slots will be top, centered, & bottom for slotted track
- Max length is 12'
- Gauges: 16ga, 18ga, 33mil, 30mil, & 30EQD



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384






CUSTOM SLOTTED TRACK



NON
STRUCTURAL

CUSTOM SLOTTED TRACK AND RIGHT ANGLE *YOUR WAY*

3 AVAILABLE SLOT POSITIONS

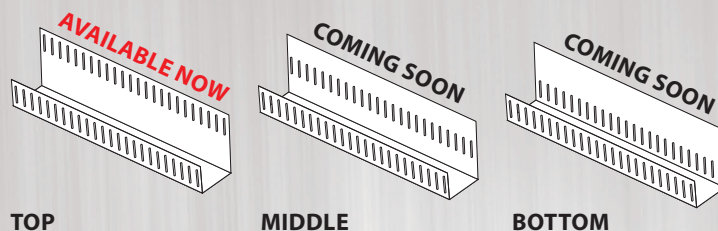


CUSTOM SLOTTED TRACK TATC LIMITATIONS:

- 12" max strip width.
- The smallest leg size is 3" to fit the 2" slot and leave 0.5" on each side of it
- The slots must be punched a minimum of 0.5" from the leading edge or a bend
- Slots will be top, centered, & bottom for slotted Track
- Max length is 12'

ENDLESS POSSIBLE COMBINATIONS

3 AVAILABLE SLOT POSITIONS

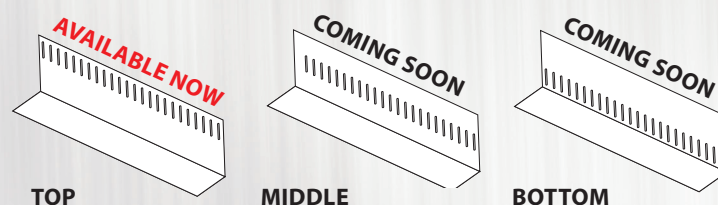

CUSTOM RIGHT ANGLE RAC LIMITATIONS:

- 12" max strip width
- The smallest leg size with a slot is 3" to fit the 2" slot and leave 0.5" on each side of it
- The smallest leg size without a slot is 5/8"
- The slots must be punched a minimum of 0.5" from the leading edge or a bend
- Slots will be top, centered, & bottom for slotted track
- Max length is 12'



INNOVATION, SERVICE, QUALITY

www.BuildStrong.com • 1-866-372-6384

