


# **LIGHT GAUGE METAL FRAMING ACCESSORIES**



[BuildStrong.com](http://BuildStrong.com)



**THE LEADER IN METAL FRAMING INNOVATION**

# LIGHT GAUGE METAL FRAMING ACCESSORIES - TABLE OF CONTENTS

---

<b>Area Separation Wall Framing</b>	3
<b>Shaftwall System</b>	4-6
CT Stud	4
J Track	5
J-L Corner	5
<b>Drywall Furring Channel (DWFC)</b>	6
(DWFC) Allowable Ceiling Spans - L/240	
(DWFC) Allowable Ceiling Spans - L/360	
<b>(CRC) Cold-Rolled Channel</b>	7
U-Channel (CRC) Section Properties	
Allowable U-Channel (CRC) Ceiling Spans - L/240	
Allowable U-Channel (CRC) Ceiling Spans - L/360	
<b>True-Brace Mechanical Bridging and Bracing <i>TELLING INNOVATION</i></b>	8
<b>True-Bridge Clips <i>TELLING INNOVATION</i></b>	9
<b>TRC Standard Rigid Clips <i>TELLING INNOVATION</i></b>	10-11
<b>KB-Kwik-Back - Wall Support Clip</b>	12
<b>True-Flatstrap (FS) <i>TELLING INNOVATION</i></b>	13
<b>T-Bead Corner Bead <i>TELLING INNOVATION</i></b>	13
<b>T-Block Wall Blocking <i>TELLING INNOVATION</i></b>	14
<b>Resilient Furring Channel (RC-1 &amp; RC-2)</b>	15
Acoustical Data	
<b>Furring and Miscellaneous</b>	16
Z-Furring (ZFC)	
Reveal Trim (RT)	
093 Expansion Control Joint	
Custom Leg Track (CLT)	
Web Stiffeners (WS)	
Utility Angle/Rolled Angle (RA)	
<b>Slotted Track - (True Action) 25" and 3"</b>	17-18
<b>Titan Header System <i>TELLING INNOVATION</i></b>	19
<b>VersaDry Track System <i>TELLING INNOVATION</i></b>	20-21

# LIGHT GAUGE METAL FRAMING ACCESSORIES - AREA SEPARATION WALL FRAMING


## Product Data:

- 2-hour rated vertical wall assemblies that provide fire-resistant protection between adjacent living units
- Area Separation Walls are also referred to as party walls, firewalls, multi-family walls and H-Stud assemblies


## Uses:

- Non-load bearing, 2-hour rated vertical wall assemblies that provide fire-resistant protection between adjacent living units in apartment buildings, condominiums and townhouses
- Assembled between two independent walls to form a commonly shared party wall that extends from the foundation through the roofline
- The walls are assembled with two 1" thick gypsum panel liners vertically installed between 2" H-Studs spaced 24"
- C-Runners or H-Tracks are installed at the top and bottom of the walls and back-to-back between vertically stacked panels.
- Overall stacked area separation wall assembly cannot exceed 50 feet


**Aluminum Angle Clip**

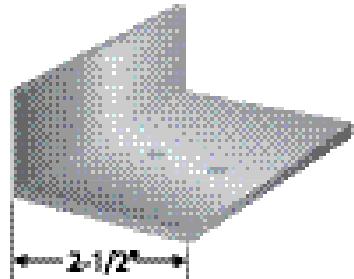

**C-Track, Cap, Edge or End Closure**

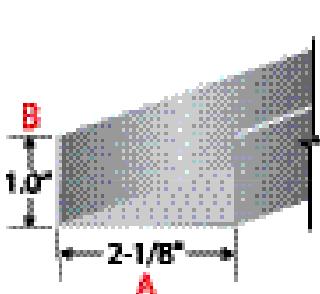

**H-Stud, 25-Gauge**

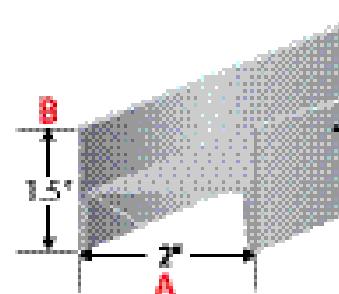

## C TRACK PRODUCT OFFERING

Section	Web (A) inches	Leg (B) inches	Coatings
213ASW-AST100-18	2.125"	1.0"	G40 standard. G60 & G90 with upcharge

## TRACK SECTIONAL PROPERTIES

Section	Design Thickness (in)	Min Thickness (in)	Fy (ksi)	Weight (lb/ft)	Area (in <sup>2</sup> )	I <sub>xx</sub> (in <sup>4</sup> )	R <sub>x</sub> (in)	I <sub>yy</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)
213ASW-AST100-18	0.0188"	0.0179"	33	0.26	0.075	0.054	0.847	0.008	0.319


## H STUD PRODUCT OFFERING

Section	Web (A) inches	Flange (B) inches	Double Wall Flange (C) inches	Hem Lip (D) inches	Coatings
200ASW-HS200	2.0"	1.50"	0.75"	0.0625" min	G40 standard G60 & G90 with upcharge


## H STUD SECTIONAL PROPERTIES

Section	Design Thickness (in)	Min Thickness (in)	Fy (ksi)	Weight (lb/ft)	Area (in <sup>2</sup> )	I <sub>xx</sub> (in <sup>4</sup> )	R <sub>x</sub> (in)	I <sub>yy</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)
200ASW-HS200	0.0188"	0.0179"	33	0.70	0.205	0.185	0.952	0.118	0.760

## C Track

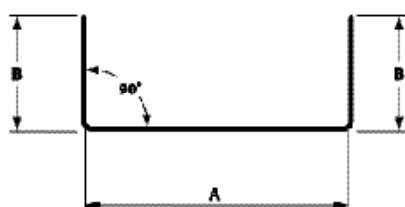


## H Stud

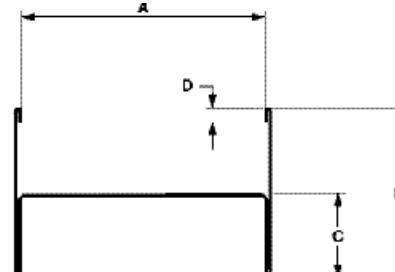

# LIGHT GAUGE METAL FRAMING ACCESSORIES - SHAFTWALL SYSTEM: CT STUD & J TRACK

Shaftwall systems are used to aid in the construction of elevator shafts, mechanical shafts, stairwells, air return shafts and horizontal membranes. The system is designed to use with 1" gypsum board. Telling's shaftwall is available in 2 1/2", 4", or 6" sizes. Shaftwall is available in 18, 33 and 40 mil thicknesses.

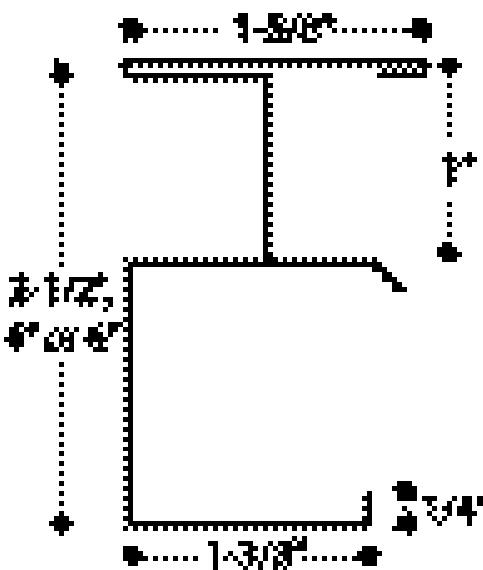

## CT Stud Product Offering

Section	Web (in)	Min Thickness (in)	Design Thickness (in)	Fy (ksi)
CT-18	2.5", 4.0", 6.0"	0.0179	0.0188	33
CT-33	2.5", 4.0", 6.0"	0.0329	0.0346	33
CT-40	2.5", 4.0", 6.0"	0.0380	0.0400	33

## CT Stud Section Properties

Section	Min Thickness (in)	Design Thickness (in)	Fy (ksi)	Weight (lb/ft)	Area (in²)	Ixx (in⁴)	Sx(C) (in⁴)	Sx(T) (in⁴)
250CT-18	0.0179"	0.0188"	33	0.47	0.118	0.132	0.095	0.118
400CT-18	0.0179"	0.0188"	33	0.58	0.015	0.374	0.171	0.207
600CT-18	0.0179"	0.0188"	33	0.72	0.181	0.957	0.299	0.347
250CT-33	0.0329"	0.0346"	33	0.82	0.218	0.242	0.175	0.217
400CT-33	0.0329"	0.0346"	33	1.02	0.267	0.687	0.341	0.380
600CT-33	0.0329"	0.0346"	33	1.26	0.333	1.759	0.543	0.637
250CT-40	0.0380"	0.0400"	33	0.99	0.291	0.273	0.253	0.192
400CT-40	0.0380"	0.0400"	33	1.19	0.351	0.811	0.476	0.353
600CT-40	0.0380"	0.0400"	33	1.47	0.431	2.142	0.827	0.628

## CT Stud & J Track Limiting Wall Heights


Limiting Wall Heights for CT Studs & J Track Shaftwall 1-Hour Fire Rated Assemblies

Section	Design Thickness (in)	5 psf				7.5 psf				10 psf			
		L/120	L/180	L/240	L/360	L/120	L/180	L/240	L/360	L/120	L/180	L/240	L/360
250CT-18	0.0188"	11' 7" f	11' - 4"	10' - 6"	9' - 0"	9' - 5" f	9' 5" f	8' 11"		8' 2" f	8' 2" f	7' 10"	
400CT-18	0.0188"	14' 6" f	14' 6" f	13 - 9	12 - 1	11-10 f	11-10 f	10-5	9-3s	9-3s	9-3s	9-3s	
600CT-18	0.0188"	16' 11" f	16 - 11f	16 - 11f	16 - 3	13-10 f	13-10 f	13-10f	13-10f	12-0f	12-0f	12-0f	12-0f
250CT-33	0.0346"	15' 9"	13 - 9	12 - 6	10 - 11	13 - 9	12-0	10-11	9-6	12-6	10-11		8-7
400CT-33	0.0346"	21' 7"	18 - 10	17 - 2	15 - 0	18-9F	16-6	15-0	13-1	16-2f	15-0	13-7	11-10
600CT-33	0.0346"	27' 10" f	25 - 3	22 - 11	20 - 1	22-9f	22-1	20-1	17-6	19-5f	19-5f	18-3	15-11
250CT-40	0.0400"	16' 11"	14 - 9	13 - 5	11 - 9	14-9	12-11	11-9	10-2	13-5	11-9	10-7	9-2
400CT-40	0.0400"	23' 4"	20 - 4	18 - 6	16 - 2	20-4	17-9	16-2	14-1	18-6	16-2	14-8	12-10
600CT-40	0.0400"	30' 11"	27 - 1	24 - 8	21 - 7	27-1	23-9	21-7	18-11	24-7f	21-7	19-8	17-3

### NOTES:

1. Allowable composite limiting heights are calculated using ICC-ES-AC86-2012
2. "f" indicates flexural stress controls the allowable wall height
3. "s" indicates the end reaction controls the allowable wall height
4. Wall Construction was: Type X 5/8" thick Gypsum board, & #6 screws
5. Stud Spacing was 24" on center
6. 600CT-33 and 600CT-40 assemblies require a 6 in screw spacing for the gypsum board along the top & bottom track.

Shaftwall systems are used to aid in the construction of elevator shafts, mechanical shafts, stairwells, air return shafts and horizontal membranes. The system is designed to use with 1" gypsum board. Telling's shaftwall is available in 2 1/2", 4", or 6" sizes. Shaftwall is available in 18, 33 and 40 mil thicknesses.

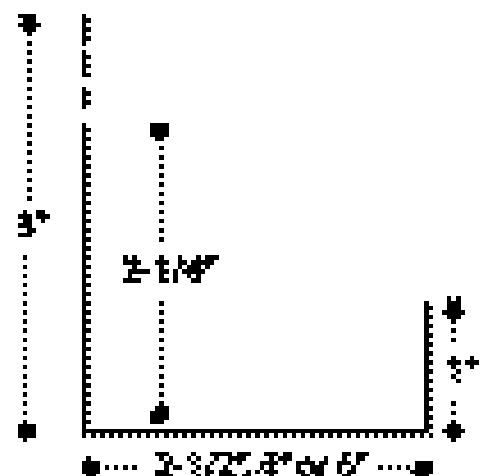

### J Track Product Offering


Section	Web (in)	Flange (in)	Min Thickness (in)	Design Thickness (in)	Fy (ksi)
JT-18	2.5", 4.0", 6.0"	2.25" & 3.0"	0.0179	0.0188	33
JT-33	2.5", 4.0", 6.0"	2.25" & 3.0"	0.0329	0.0346	33

### J Track Sectional Properties

Section	Min Thickness (in)	Design Thickness (in)	Fy (ksi)	Weight (lb/ft)	Area (in²)	Ixx (in⁴)	Rx (in)	Iyy (in⁴)	Ry (in)
250JT225-18	0.0179	0.0188"	33	0.3681	0.1082	0.1193	1.05	0.0471	0.6601
400JT225-18	0.0179	0.0188"	33	0.464	0.1364	0.3404	1.5799	0.0532	0.6247
600JT225-18	0.0179	0.0188"	33	0.592	0.174	0.878	2.2466	0.0583	0.5787
250JT300-18	0.0179	0.0188"	33	0.4161	0.1223	0.1322	1.0399	0.1025	0.9155
400JT300-18	0.0179	0.0188"	33	0.512	0.1505	0.3772	1.5834	0.1158	0.8774
600JT300-18	0.0179	0.0188"	33	0.64	0.1881	0.9689	2.2697	0.1274	0.823
250JT225-33	0.0329	0.0346"	33	0.6765	0.1988	0.22	1.052	0.086	0.6575
400JT225-33	0.0329	0.0346"	33	0.8531	0.2507	0.6269	1.5813	0.097	0.622
600JT225-33	0.0329	0.0346"	33	1.0886	0.3199	1.6159	2.2474	0.1061	0.576
250JT300-33	0.0329	0.0346"	33	0.7648	0.2248	0.244	1.0419	0.1874	0.9131
400JT300-33	0.0329	0.0346"	33	0.9414	0.2767	0.695	1.5849	0.2117	0.8748
600JT300-33	0.0329	0.0346"	33	1.1769	0.3459	1.7835	2.2708	0.2328	0.8204

### SHAFTWALL SYSTEM: JL CORNER

Shaftwall systems are used to aid in the construction of elevator shafts, mechanical shafts, stairwells, air return shafts and horizontal membranes. The system is designed to use with 1" gypsum board. MBA's shaftwall is available in 2 1/2", 4", or 6" sizes. Shaftwall is available in 18 and 33 mil thicknesses.

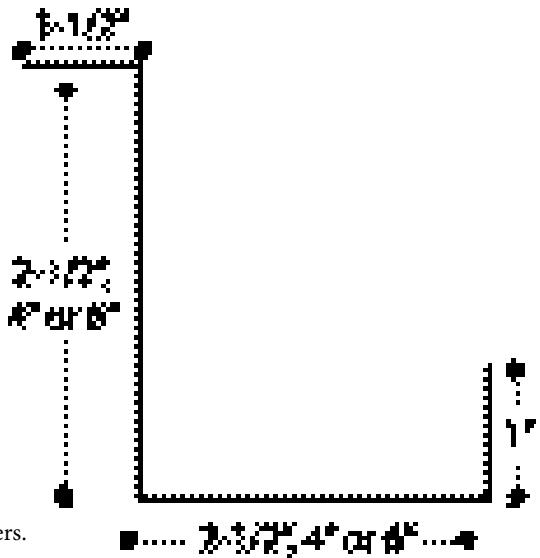


### J-L Corner Product Offering

Section	Web (in)	Flange (in)	Min Thickness (in)	Design Thickness (in)	Fy Yield Stress (ksi)	Notes
JL-18	2.5", 4.0", 6.0"	2.5", 4.0", 6.0"	0.0179"	0.0188"	33	12' max length
JL-33	2.5", 4.0", 6.0"	2.5", 4.0", 6.0"	0.0329"	0.0346"	33	12' max length
JL-40	2.5", 4.0", 6.0"	2.5", 4.0", 6.0"	0.0038"	0.0400"	33	12' max length

### Recommendations

- Use a fastening plate to secure the J track whenever fasteners are closer than 4" to the edge. Setting the plate at the time of concrete construction will avoid spalling by mechanical fasteners.
- Cut C-T studs 3/4" less than the height of the opening.
- Cut 1" shaftliner panel 3/4" less than the height of the opening.
- In structural steel-frame construction, install J track sections before applying spray-on fireproofing.
- Items to be anchored to the wall (cabinets, sinks, handrails, etc.) should be fastened to the C-T or to plates secured behind or between layers of 1/2" Type C gypsum board.
- Joint compounds should be applied at ambient temperatures above 50°F (10°C) with adequate ventilation.
- Use Type S screws for 25-gauge steel framing. Use Type S-12 screws for 20-gauge (or heavier) steel framing.
- It is important that the job structural engineer approves the type, size and maximum spacing of track fasteners to meet the design load requirements.

# LIGHT GAUGE METAL FRAMING ACCESSORIES - (DWFC) DRYWALL FURRING CHANNEL

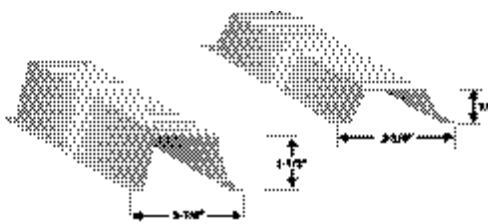

## Product Data:

- Available in 7/8" and 1-1/2" sizes.
- Gauge: Standard 25 through 12 gauges.
- Lengths: 12' 0": stock length, (other lengths available).
- Consult Telling Industries' light gauges structural framing and accessories brochure for structural properties and span tables

## Uses:

- Conventional accessory components for use in furring out ceilings and masonry walls. Knurled face prevents screw "ride" when attaching gypsum wallboard.
- 1-1/2" DWFC is economical with respect to furring walls with electrical boxes, (no need to set into concrete).

## DRYWALL FURRING CHANNELS (DWFC): SECTION PROPERTIES

Section	50Fy (ksi)	Design Thickness (in)	Gross Properties						Effective Properties		
			Area (in <sup>2</sup> )	Weight (lb/ft)	I <sub>x</sub> (in <sup>4</sup> )	R <sub>x</sub> (in)	I <sub>y</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)	I <sub>x</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	M <sub>a</sub> (Ft-lb)
DWFC088-18	33	0.0188	0.070	0.239	0.009	0.356	0.035	0.710	0.009	0.016	26.4
DWFC088-30	33	0.0312	0.115	0.391	0.014	0.353	0.058	0.710	0.014	0.031	50.5
DWFC088-43	33	0.0451	0.162	0.550	0.020	0.348	0.082	0.711	0.020	0.042	69.2
DWFC088-54	50	0.0566	0.197	0.669	0.023	0.345	0.099	0.711	0.023	0.050	124.9
DWFC150-18	33	0.0188	0.094	0.320	0.031	0.575	0.047	0.705	0.030	0.034	56.6
DWFC150-30	33	0.0312	0.154	0.525	0.050	0.571	0.077	0.705	0.050	0.064	105.3
DWFC150-43	33	0.0451	0.219	0.745	0.070	0.565	0.109	0.705	0.070	0.089	146.3
DWFC150-54	50	0.0566	0.269	0.914	0.084	0.561	0.134	0.705	0.084	0.107	267.2

Notes:

1. Properties based on the 2007 NASPEC
2. Design thickness used for determination of properties. Minimum delivered thickness must be no less than 95% of design thickness.
3. For deflection calculations, use effective I<sub>x</sub>. Effective I<sub>x</sub> based on Procedure 1 of NASPEC
4. Effective properties are given as the minimum value for positive or negative bending

## DRYWALL FURRING CHANNEL (DWFC) ALLOWABLE CEILING SPANS - L/240

Section	Fy (ksi)	Spans	4 psf Spacing (in) oc			Uniform Load 6 psf Spacing (in) oc			13 psf Spacing (in) oc		
			12	16	24	12	16	24	12	16	24
			5'-2"	4'-9"	4'-1"	4'-6"	4'-1"	3'-7"	3'-6"	3'-2"	2'-9"
DWFC088-18	33	Single	5'-2"	4'-9"	4'-1"	4'-6"	4'-1"	3'-7"	3'-6"	3'-2"	2'-9"
		Multiple	6'-5"	5'-10"	5'-1"	5'-7"	5'-1"	4'-2"	4'-0"	3'-6"	2'-9"
DWFC088-30	33	Single	6'-5"	5'-7"	4'-11"	5'-5"	4"-11"	4'-3"	4'-2"	3'-9"	3'-4"
		Multiple	6'-2"	6'-11"	6'-1"	6'-8"	6'-1"	5'-3"	5'-2"	4'-8"	3'-11"
DWFC088-43	33	Single	7'-7"	6'-3"	5'-5"	6'-0"	5'-5"	4'-9"	4'-7"	4'-2"	3'-8"
		Multiple	6'-10"	7'-8"	6'-9"	7'-5"	6'-9"	5'-10"	5'-9"	5'-2"	4'-6"
DWFC088-54	50	Single	8'-6"	6'-7"	5'-9"	6'-4"	5'-9"	5'-0"	4'-11"	4'-5"	3'-11"
		Multiple	9'-0"	8'-2"	7'-2"	7'-10"	7'-2"	6'-3"	6'-1"	5'-6"	4'-10"
DWFC150-18	33	Single	7'-11"	7'-2"	6'-3"	6'-11"	6'-3"	5'-6"	5'-4"	4'-10"	4'-2"
		Multiple	9'-9"	8'-10"	7'-5"	8'-6"	7'-5"	5'-11"	5'-7"	4'-9"	3'-8"
DWFC150-30	33	Single	9'-5"	8'-6"	7'-5"	8'-2"	7'-5"	6'-6"	6'-4"	5'-9"	5'-0"
		Multiple	11'-7"	10'-6"	9'-2"	10'-2"	9'-2"	8'-0"	7'-10"	7'-0"	5'-8"
DWFC150-43	33	Single	10'-6"	9'-6"	8'-4"	9'-2"	8'-4"	7'-3"	7'-1"	6'-5"	5'-7"
		Multiple	12'-11"	11'-9"	10'-3"	11'-4"	10'-3"	9'-0"	8'-9"	7'-11"	6'-8"
DWFC150-54	50	Single	11'-2"	10'-1"	8'-10"	9'-9"	8'-10"	7'-9"	7'-6"	6'-10"	6'-0"
		Multiple	13'-9"	12'-6"	10'-11"	12'-0"	10'-11"	9'-7"	9'-4"	8'-5"	7'-5"


## DRYWALL FURRING CHANNEL (DWFC) ALLOWABLE CEILING SPANS - L/360

Section	Fy (ksi)	Spans	4 psf Spacing (in) oc			Uniform Load 6 psf Spacing (in) oc			13 psf Spacing (in) oc		
			12	16	24	12	16	24	12	16	24
			4'-6"	4'-1"	3'-7"	4'-0"	3'-7"	3'-2"	3'-1"	2'-9"	2'-5"
DWFC088-18	33	Single	4'-6"	4'-1"	3'-7"	4'-0"	3'-7"	3'-2"	3'-1"	2'-9"	2'-5"
		Multiple	5'-7"	5'-1"	4'-5"	4'-11"	4'-5"	3'-11"	3'-9"	3'-5"	2'-9"
DWFC088-30	33	Single	5'-5"	4'-11"	4'-3"	4'-8"	4'-3"	3'-9"	3'-8"	3'-4"	2'-11"
		Multiple	6'-8"	6'-1"	5'-3"	5'-10"	5'-3"	4'-7"	4'-6"	4'-1"	3'-7"
DWFC088-43	33	Single	6'-0"	5'-5"	4'-9"	5'-3"	4'-9"	4'-2"	4'-0"	3'-8"	3'-2"
		Multiple	7'-5"	6'-9"	5'-10"	6'-6"	5'-10"	5'-2"	5'-0"	4'-6"	4'-0"
DWFC088-54	50	Single	6'-4"	5'-9"	5'-0"	5'-7"	5'-0"	4'-5"	4'-3"	3'-11"	3'-5"
		Multiple	7'-10"	7'-2"	6'-3"	6'-10"	6'-3"	5'-5"	5'-4"	4'-10"	4'-2"
DWFC150-18	33	Single	6'-11"	6'-3"	5'-6"	6'-0"	5'-6"	4'-9"	4'-8"	4'-3"	3'-8"
		Multiple	8'-6"	7'-9"	6'-9"	7'-5"	6'-9"	5'-11"	5'-7"	4'-9"	3'-8"
DWFC150-30	33	Single	8'-2"	7'-5"	6'-6"	7'-2"	6'-6"	5'-8"	5'-6"	5'-0"	4'-5"
		Multiple	10'-2"	9'-2"	8'-0"	8'-10"	8'-0"	7'-0"	6'-10"	6'-3"	5'-5"
DWFC150-43	33	Single	9'-2"	8'-4"	7'-3"	8'-0"	7'-3"	6'-4"	6'-2"	5'-7"	4'-11"
		Multiple	11'-4"	10'-3"	9'-0"	9'-11"	9'-0"	7'-10"	7'-8"	6'-11"	6'-1"
DWFC150-54	50	Single	9'-9"	8'-10"	7'-9"	8'-6"	7'-9"	6'-9"	6'-7"	6'-0"	5'-3"
		Multiple	12'-0"	10'-11"	9'-7"	10'-6"	9'-7"	8'-4"	8'-2"	7'-5"	6'-5"

Notes:

1. Single spans taken as the minimum span based on moment, shear, web crippling or deflection
2. Multiple spans indicate two or more equal, continuous spans with span length measured support to support.
3. Multiple spans taken as the minimum span based on moment, shear, web crippling, deflection combined bending and shear or combined and web crippling
4. Web crippling values based on 1" bearing at end and interior supports.

# LIGHT GAUGE METAL FRAMING ACCESSORIES - (CRC) COLD-ROLLED CHANNEL

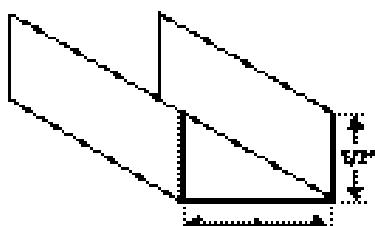

## Product Data:

- Available in galvanized steel meeting ASTM A-1003 or hot-dipped galvanized steel meeting ASTM A-653, G60.
- Lengths: 16' stock length. (Other lengths available)

## Uses:

- Bridging, (lateral support) in walls carrying axial and/or wind loads.
- Bracing studs at door bucks and furring for ceilings.
- Used in conjunction with metal lath and plaster in partitions, ceilings, column and beam enclosures, etc.

## U-CHANNEL (CRC) SECTION PROPERTIES

Section	Design Thickness (in)	Gross							Effective Properties 33 ksi			
		Area (in²)	Weight (lb/ft)	Ix (in)	Rx (in)	Iy (in⁴)	Ry (in)	Ix (in⁴)	Sx (in³)	Ma (in-k)	Va (lb)	
CRC-075	0.0566	0.087	0.30	0.007	0.288	0.002	0.155	0.007	0.019	0.45	315	
CRC-150	0.0566	0.129	0.44	0.039	0.547	0.003	0.144	0.039	0.052	1.22	840	
CRC-200	0.0566	0.157	0.54	0.079	0.079	0.003	0.136	0.079	0.079	1.87	1190	
CRC-250	0.0566	0.186	0.63	0.139	0.866	0.003	0.128	0.139	0.111	2.64	1540	

Notes:

1. Minimum deliverable base metal thickness is 95% of design thickness.
2. Inside bend radius taken as 3/32"
3. Effective properties based on Fy = 33ksi
4. For deflection calculations, use the effective moment of inertia

## ALLOWABLE U-CHANNEL (CRC) CEILING SPANS - L/240

Section	Spans	4 psf Channel Spacing (in) o.c.						6 psf Channel Spacing (in) o.c.						13 psf Channel Spacing (in) o.c.						15 psf Channel Spacing (in) o.c.						
		24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72
CRC-075	Single	3' 11"	3' 5"	3' 1"	2' 10"	2' 8"	3' 5"	3' 0"	2' 8"	2' 6"	2' 4"	2' 7"	2' 4"	2' 1"	1' 11"	1' 9"	2' 6"	2' 2"	2' 0"	1' 10"	1' 8"					
	Multiple	4' 10"	4' 2"	3' 10"	3' 7"	3' 4"	4' 2"	3' 8"	3' 4"	3' 1"	2' 10"	3' 3"	2' 9"	2' 4"	2' 1"	1' 11"	3' 1"	2' 7"	2' 2"	2' 0"	1' 9"					
CRC-150	Single	5' 6"	4' 10"	4' 5"	4' 1"	3' 10"	4' 10"	4' 3"	3' 10"	3' 7"	3' 5"	3' 9"	3' 3"	3' 0"	2' 9"	2' 7"	3' 7"	3' 2"	2' 10"	2' 7"	2' 5"					
	Multiple	7' 1"	6' 2"	5' 8"	5' 3"	4' 11"	6' 2"	5' 5"	4' 11"	4' 7"	4' 4"	4' 10"	4' 2"	3' 9"	3' 4"	3' 0"	4' 7"	4' 0"	3' 6"	3' 1"	2' 9"					
CRC-200	Single	5' 10"	5' 1"	4' 8"	4' 4"	4' 1"	5' 1"	4' 6"	4' 1"	3' 10"	3' 7"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"	3' 10"	3' 4"	3' 1"	2' 10"	2' 8"					
	Multiple	7' 5"	6' 6"	5' 11"	5' 6"	5' 2"	6' 6"	5' 8"	5' 2"	4' 10"	4' 7"	5' 1"	4' 5"	4' 0"	3' 9"	3' 6"	4' 10"	4' 3"	3' 10"	3' 7"	3' 2"					
CRC-250	Single	6' 1"	5' 4"	4' 10"	4' 6"	4' 3"	5' 4"	4' 8"	4' 3"	4' 0"	3' 9"	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"					
		7' 9"	6' 9"	6' 2"	5' 9"	5' 5"	6' 9"	5' 11"	5' 5"	5' 0"	4' 9"	5' 3"	4' 7"	4' 3"	3' 11"	3' 9"	5' 0"	4' 5"	4' 0"	3' 9"	3' 7"					

## ALLOWABLE U-CHANNEL (CRC) CEILING SPANS - L/360

Section	Spans	4 psf Channel Spacing (in) o.c.						6 psf Channel Spacing (in) o.c.						13 psf Channel Spacing (in) o.c.						15 psf Channel Spacing (in) o.c.						
		24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72
CRC-075	Single	3' 5"	3' 0"	2' 8"	2' 6"	2' 4"	3' 0"	2' 7"	2' 4"	2' 2"	2' 1"	2' 4"	2' 0"	1' 10"	1' 8"	1' 7"	2' 2"	1' 11"	1' 9"	1' 7"	1' 6"					
	Multiple	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	3' 8"	3' 2"	2' 11"	2' 8"	2' 7"	2' 10"	2' 6"	2' 3"	2' 1"	1' 11"	2' 8"	2' 4"	2' 2"	2' 0"	1' 9"					
CRC-150	Single	5' 6"	4' 10"	4' 5"	4' 1"	3' 10"	4' 10"	4' 3"	3' 10"	3' 7"	3' 5"	3' 9"	3' 3"	3' 0"	2' 9"	2' 7"	3' 2"	2' 10"	2' 7"	2' 5"						
	Multiple	7' 1"	6' 2"	5' 8"	5' 3"	4' 11"	6' 2"	5' 5"	4' 11"	4' 7"	4' 4"	4' 10"	4' 2"	3' 9"	3' 4"	3' 0"	4' 7"	4' 0"	3' 6"	3' 1"	2' 9"					
CRC-200	Single	5' 10"	5' 1"	4' 8"	4' 4"	4' 1"	5' 1"	4' 6"	4' 1"	3' 10"	3' 7"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"	3' 10"	3' 4"	3' 1"	2' 10"	2' 8"					
	Multiple	7' 5"	6' 6"	5' 11"	5' 6"	5' 2"	6' 6"	5' 8"	5' 2"	4' 10"	4' 7"	5' 1"	4' 5"	4' 0"	3' 9"	3' 6"	4' 10"	4' 3"	3' 10"	3' 7"	3' 2"					
CRC-250	Single	6' 1"	5' 4"	4' 10"	4' 6"	4' 3"	5' 4"	4' 8"	4' 3"	4' 0"	3' 9"	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"					
		7' 9"	6' 9"	6' 2"	5' 9"	5' 5"	6' 9"	5' 11"	5' 5"	5' 0"	4' 9"	5' 3"	4' 7"	4' 3"	3' 11"	3' 9"	5' 0"	4' 5"	4' 0"	3' 9"	3' 7"					

Notes:


1. Multiple span indicates two or more equal spans with channel continuous over interior supports.
2. End and interior bearing length = 0.75". Web stiffeners are not required.
3. Listed spans are based on unbraced compression flanges.
4. Moment of inertia for deflection is calculated at the maximum service level stress for the span and load listed. Note that this value may be higher than the effective Ixx listed in section property tables.

**Product Data:**


- Available in galvanized steel meeting ASTM A-1003 or hot-dipped galvanized steel meeting ASTM A-653, G60.
- Lengths: 52" stock length. (Other lengths available in 4" increments).
- Patent # 10,309,107 (T-Brace), Patent # 10,508,446 (T-Bridge).

**Uses:**

- Bridging, (lateral support) in walls carrying axial and/or wind loads.
- Clips are not required for many non-load bearing applications.

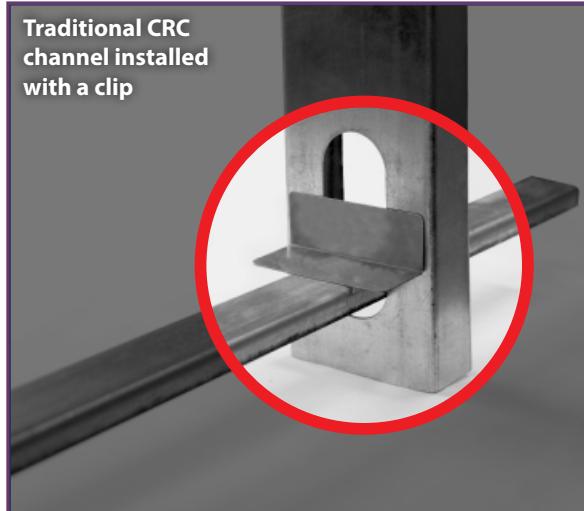


**SEE  
THE  
VIDEO**

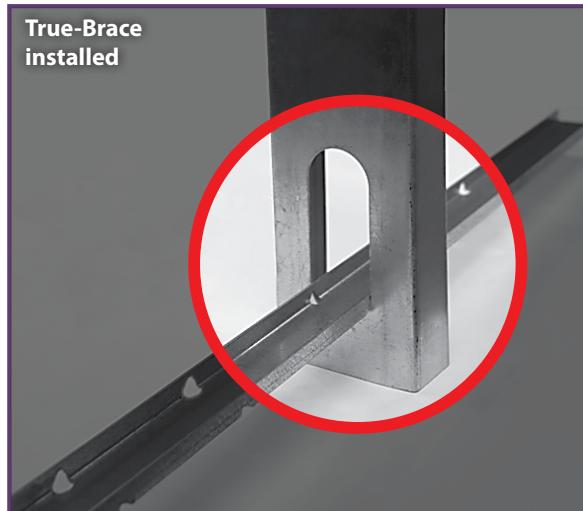
**SECTION PROPERTIES**

Section	Design Thickness (in)	Gross Properties									
		Fy (ksi)	Web (in)	Area (in <sup>2</sup> )	Weight (lb/ft)	I <sub>xx</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	R <sub>x</sub> (in)	I <sub>yy</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)	
TB150-54	0.0566	0.0538	50	1.57	0.132	0.45	0.0460	0.0053	0.590	0.002	0.125

Section	Design Thickness (in)	Effective Properties								
		Fy (ksi)	Web (in)	Area (in <sup>2</sup> )	Weight (lb/ft)	I <sub>xx</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	M <sub>a-L</sub> (in-k)	V <sub>ax</sub> (lb)	
TB150-54	0.0566	0.0538	50	1.57	0.132	0.45	0.0460	0.0053	1.586	1464

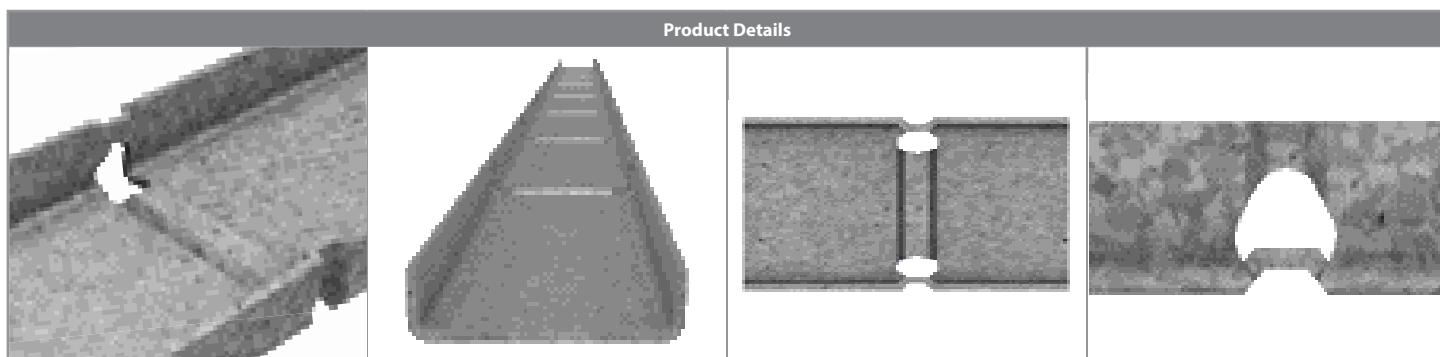

True-Brace with self nesting geometry to fit one part inside of another and secured with a screw.  
True-Brace locking features spaced every 4" to accommodate 12", 16" and 24" on center stud spacing.

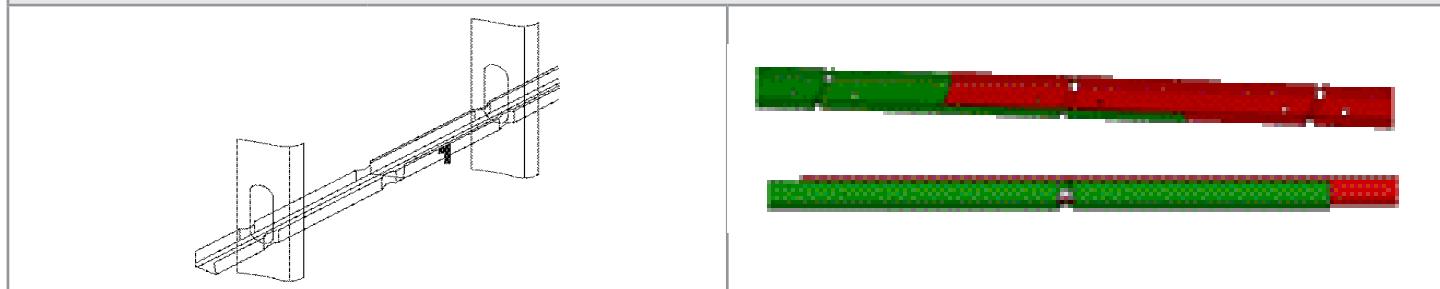

**Product Data:**

T-Bridge Clips are a highly engineered new product from Telling used with T-Brace or traditional CRC mechanical bridging.

Telling's T-Bridge clips were engineered with the installer in mind. The ergonomic design facilitates easy screw drive access and hands free assembly.




The patented T-Bridge Clips are made of 18 gauge, premium steel and are available in two functional designs, terminating and joining.

**TYPES OF TRUE-BRIDGE CLIPS:****True-Bridge Clip (Terminating)**

- Used to join True-Brace to a Stud at a corner, doorway, or end of wall
- 1.75" X 3.2" X 1.25"

**True-Bridge Clip (Joining)**


- Used to joint True-Brace to True-Brace or CRC to CRC for higher load applications
- 3.5" X 3.2" X 1.25"

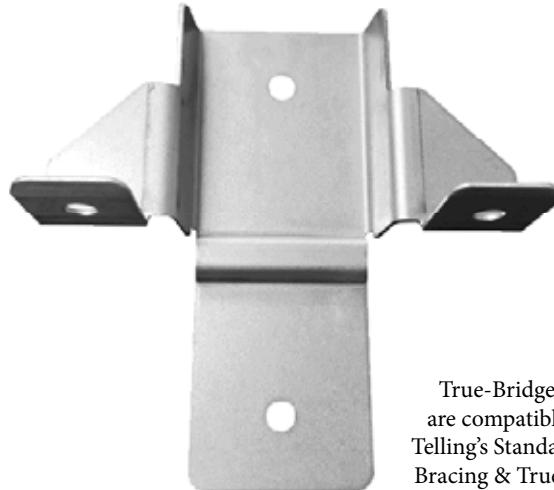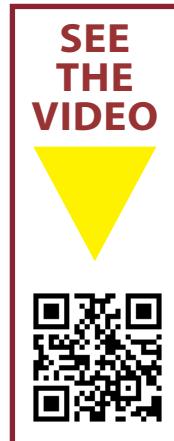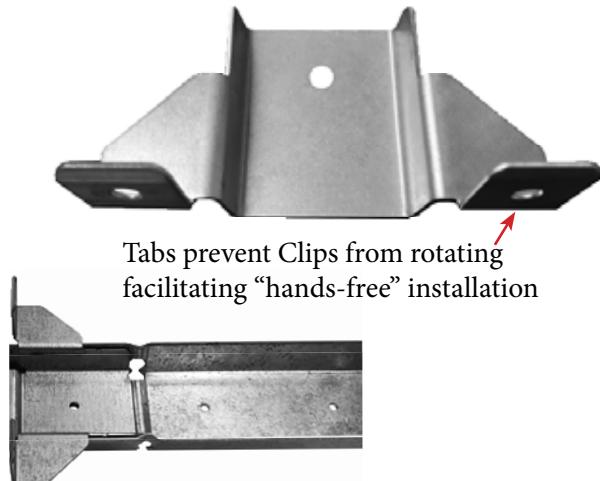**FEATURES:**


- Made of Galvanized Steel
- Highly Engineered for Ease of Installation
- Slides Easily into Place When Used in Conjunction with True-Brace

**BENEFITS:**

- Reduces Installation Time
- 10% Savings on Material and Labor Costs
- No Clips or Welding Required
- Easy Installation Due to Patented Design

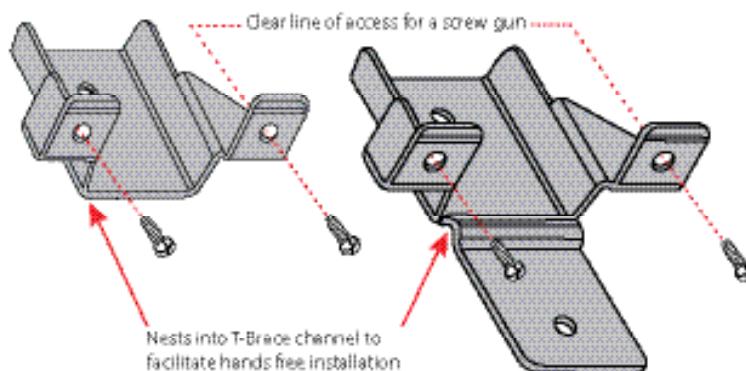**USES:**

- Used to join True-Brace to a stud at a corner, doorway, or end of wall
- 1 Screw to True-Brace and up to 2 Screws to Stud
- Clip is also compatible with standard CRC Bracing

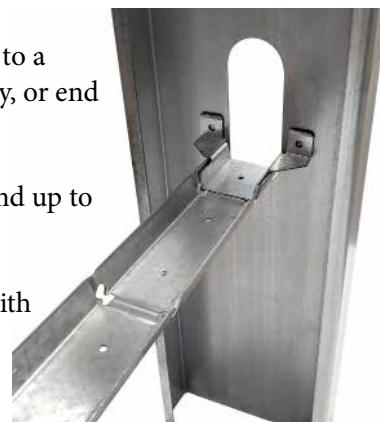

# TELLING, THE CUSTOM CLIP EXPERT!

## NEED SOMETHING SPECIAL? WE CAN DO IT!



## We can drill and bend any darn thing!





### CUSTOM LENGTHS AND HOLE PATTERNS

Illustration is an example of 1 of 1000's of possible custom hole patterns.

Developed in-house flexible manufacturing technology to make nearly any hole pattern & custom geometry with minimal leadtime, set up, and labor.

#### PRODUCT DATA:

- Maximum of 6 holes per pattern grouping
- Leg 1 + Leg 2 = max of 10", min of 1.5".
- Clip Length = max of 17", min of 2.0"

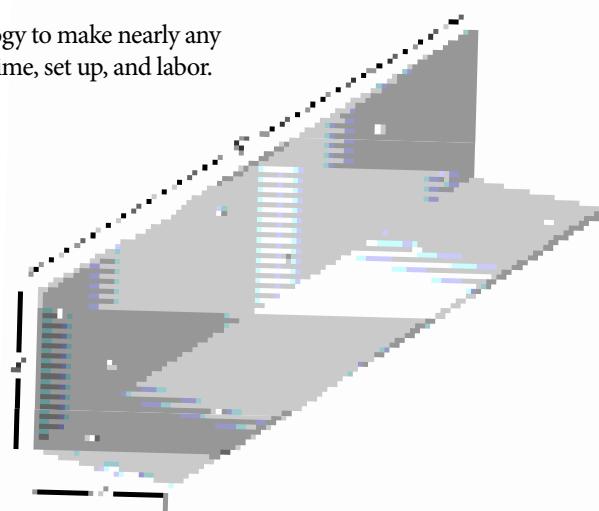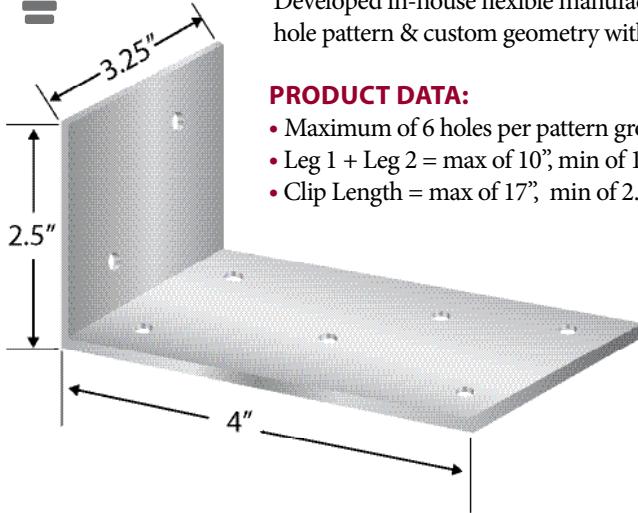

If your project needs connectors not shown in this catalog, please contact your inside sales rep or send an inquiry to [www.buildstrong.com](http://www.buildstrong.com).




Telling Industries manufactures an extensive line of Metal Framing Connectors and Clips. Standard gauges are complimented with specialized and custom fabricated Clips to meet all your Metal Framing needs and available in standard G60 and optional G90 coatings. All Telling products, including Metal Framing Connectors, are proudly made in the USA.

**TRC A Series Rigid Right Angle Clips**  
Predominately Used to Attach Metal Framing to Metal Framing


Section	Clip Thickness	Leg Length (in)	Clip Length (in)	BKT Quantity
TRC223	0.0538" (16ga)	2" x 2"	3.0"	150
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC225	0.0538" (16ga)	2" x 2"	5.0"	120
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC227	0.0538" (16ga)	2" x 2"	7.0"	100
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC229	0.0538" (16ga)	2" x 2"	9.0"	75
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC2211	0.0538" (16ga)	2" x 2"	11.0"	30
	0.0677" (14ga)			
	0.0966" (12ga)			

Clip allowable load data is available and 3rd party PE validated.

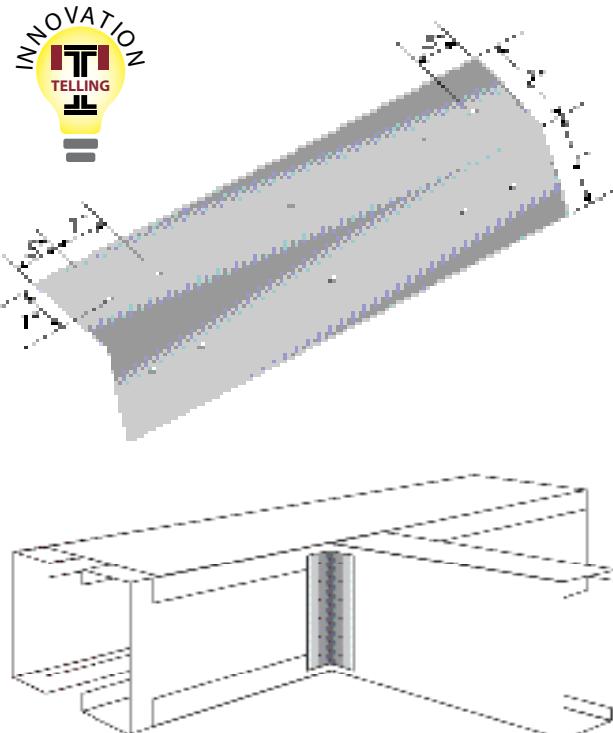

**TRC B Series Rigid Right Angle Clips**  
Predominately Used to Attach Metal Framing to Red Iron or Concrete  
(B for Bolt hole)

Section	Clip Thickness	Leg Length (in)	Clip Length (in)	BKT Quantity
TRC143	0.0538" (16ga)	1.5" x 4"	3.5"	120
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC145	0.0538" (16ga)	1.5" x 4"	5.5"	100
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC147	0.0538" (16ga)	1.5" x 4"	7.5"	100
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC149	0.0538" (16ga)	1.5" x 4"	9.5"	75
	0.0677" (14ga)			
	0.0966" (12ga)			
TRC1411	0.0538" (16ga)	1.5" x 4"	11.5"	30
	0.0677" (14ga)			
	0.0966" (12ga)			

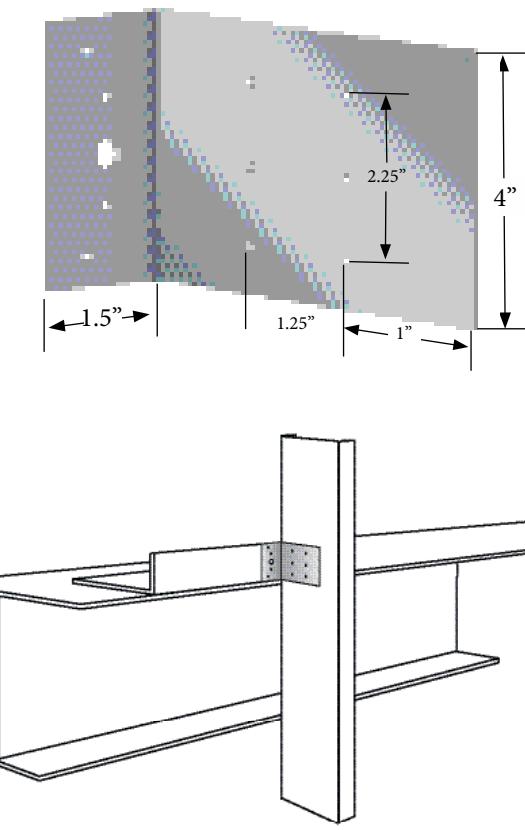


\*All Sales are subject to Telling's Terms & Conditions found at [www.buildstrong.com](http://www.buildstrong.com). Prices are subject to change without further notice. Please contact your Telling Sales Representative for further inquiries.

\*\*Prices Listed are for each G60 clip when sold in BUCKET quantities. Individual (EA) cost on the clips will be +5% from the bucket price.

**Product Application**

- Kwik-Back products are cost effective and labor saving solution to creating superior backing support for wall shelving, cabinetry, heavy wall hangings, and other equipment.

- Installation is simplified by using 2 or 3 screws to attach the clip to the stud flange. No pre-determined stud layout is required and ledge tabs are added for easy alignment. Attach 2" x 6" structure grade lumber (#1 or better) as required by codes or specifications.

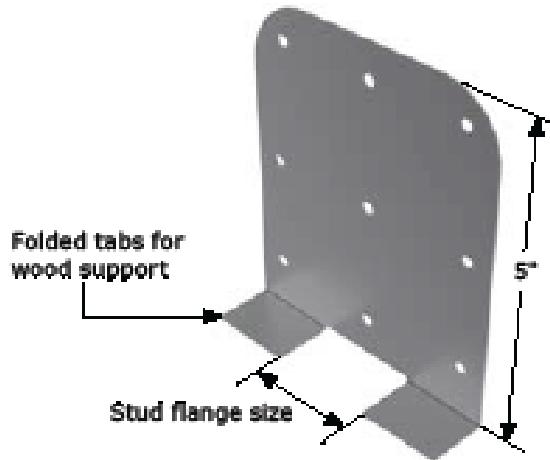**Feature and Benefits**

- Loads based on #8 screws
- Pre-punched guide holes
- Folded tabs for consistent wood positioning
- Screws included

**Material Composition**

- Mill certified steel
- ASTM A653/A653M
- 33 mil
  - 33 ksi yield strength
  - G60 galvanized coating

**QUANTITY / ORDER INFORMATION**


Part Number	Flange Width	Qty/Bucket	Lbs/Bucket
KB162-33	1-1/4" to 1-5/8"	200	50

**ALLOWABLE LOADS**

Part Number	Stud Properties			F1 Allowable Loads (Lbs)		F3 Allowable Loads (lbs)	
	Mil	Gauge	Fy (ksi)	2 #8 Screws	3 #8 Screws	2 #8 Screws	3 #8 Screws
KB	33	20 (S)	33	145	217	328	493

**Notes:**

- Allowable loads have not been increased for wind, seismic activity, or other factors.
- The allowable loads are based on the steel properties of the members being connected, per AISI S100.
- The nominal strength of the screw must be at least 3.75 times the allowable loads.
- Values include a 3.0 factor of safety.
- Penetration of screws through joined materials should not be less than three exposed threads. Install and tighten screws in accordance with the screw manufacturer's recommendations.
- Allowable loads indicated on the table(s) are for force in single direction only. The designer shall use the combined forces check as required by AISI S100 if more than one force is applied to the connection.

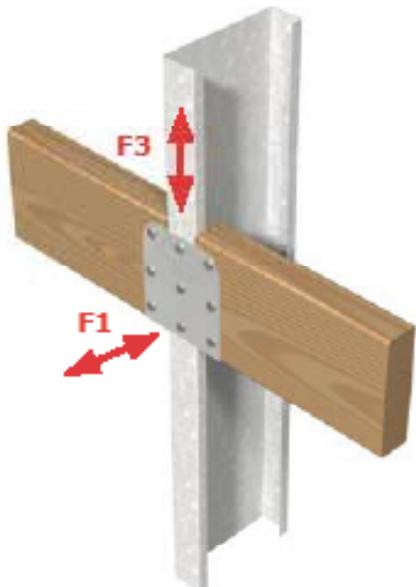

Example of the Kwik-Back used for hanging cupboards.






## Product Data:

- Designation: FS(Width)-Mil
  - Ex: FS200-30
- Stock widths: 2", 4", 6", 8" and 10"
- Custom Widths are available in increments of even inches
- Length: 10', 12', 14', 16', 18', 20', 22', & 24' (custom lengths available in 1' increments)
- Note: 16' through 24' length will have additional packaging costs  
- 10 piece minimum order quantities must be strictly followed for 16' & longer lengths in order to package, ship, & handle safely
- Gauges:
  - 33KSI: 25, 22, 20, 20S& 18 gauge
  - 50KSI: 20S, 22, 16, 14 &12 gauge
- Cut off angle: 90°, 45°, 40°, 35°, 30°, 25°, 20°, 15°, 10°, 5°
- Available in smooth (2"-10") and knurled textures from (2" - 8").  
The knurled finish helps start a screw
- Coating:
  - Drywall: Standard G-40 Hot Dipped Galvanized. Also Available in G-60 and G-90
  - Structural: G-60 Hot Dipped Galvanized. Also Available in G-60 and G-90
- Meets applicable ASTM's for Structural and Drywall applications:
  - ASTM- A1003, A-653, A924, C-645, C754, C955, C1007





## Uses:

- Provides tension force resistance in shear wall assemblies
- Backing plates for fixtures, railings and where ever additional pullout strength is required
- Resists racking of prefabricated wall assemblies while handling, transporting, and erecting



Knurled pattern for better screw starting.

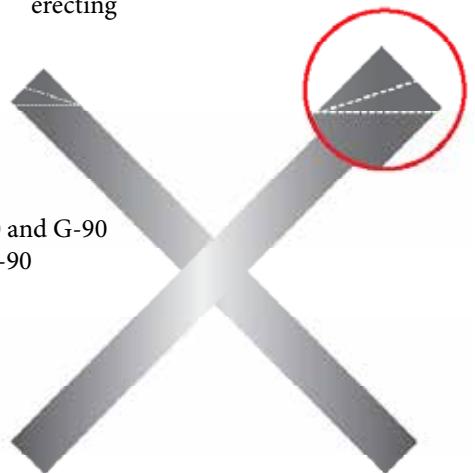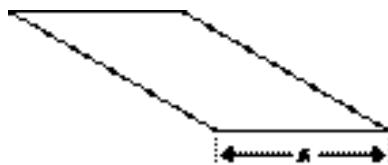

## (DCB) DRYWALL CORNER BEAD




## Product Data:

- Made of galvanized steel
- Optimized bend angle
- Reinforces drywall corners
- Prevents dents, scrapes and damage
- Deeper knurling for superior adhesion
- Staggered hole pattern for a smoother finish


## Uses:

- Provides durable protection for drywall external corners.
- Specify hot-dipped for moist or humid conditions.

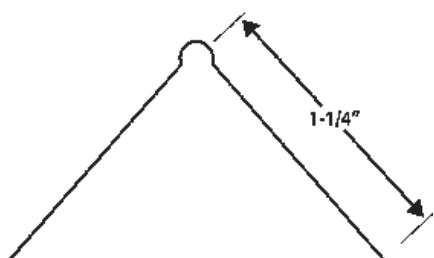


Length	Pieces Per Carton	Cartons Per Pallet	Pieces Per Pallet	Lineal Feet Per Carton
8'	63	50	3150	503
9'	56	50	2800	503
10'	50	50	2500	500
12'	50	50	2500	600


New nose design requires less mud for a superior finish every time!

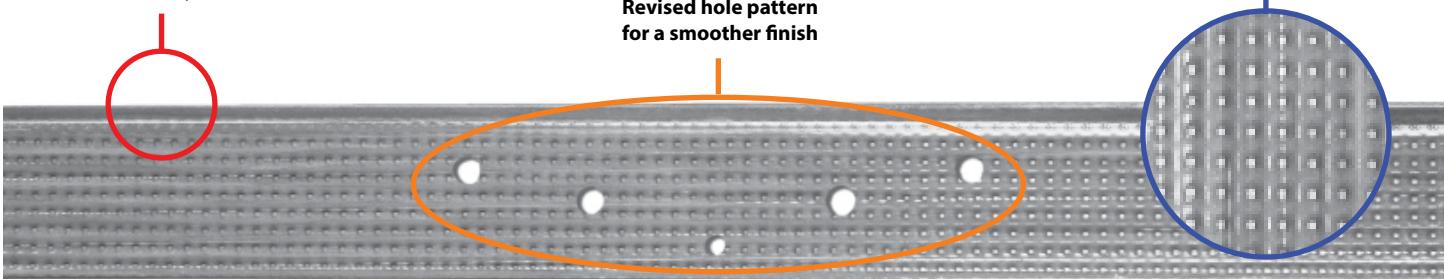

# LIGHT GAUGE METAL FRAMING ACCESSORIES - T-BLOCK WALL BLOCKING



Blocking a metal stud wall refers to installing a short piece of stud horizontally between the vertical studs. The purpose of blocking is to provide an attachment support point for mounted construction features like shelving, frames, cabinets, railings or other fixed hardware. Patent Pending 17985838

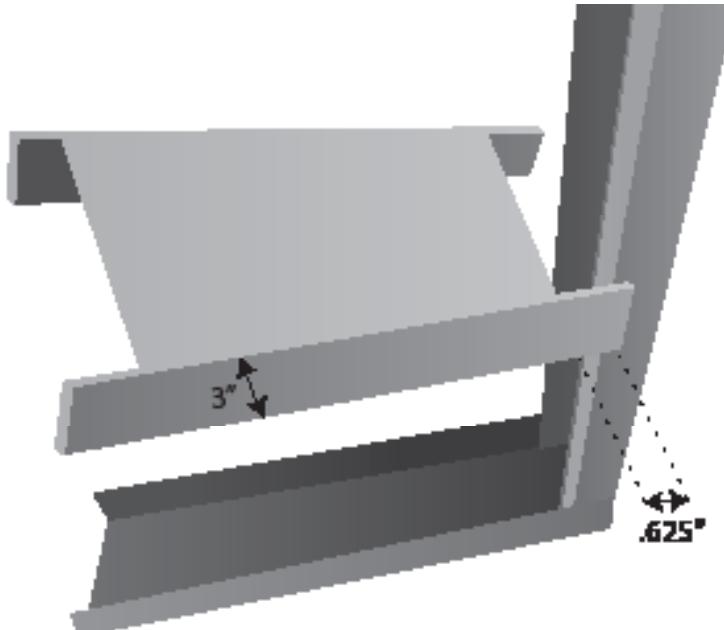

## Product offering:


- Blocking Gauges: 16ga and 20ga (30 mil), G60 is standard.
- Lengths: Sized to accommodate 12", 16", & 24" on-center stud spacing
- Web Sizes: Fits 3-5/8", 4", 6", 8", 10", 12" web sizes.
- Leg/Flange: 3"
- Industry Standard Blocking Nomenclature:  
TB362-300-S16-54, which is Track Blocking, 3-5/8" web, 3" flange, Stud spacing of 16" on center, 54 mils thick

T-Block Part No.	Gauge	Minimum Thickness (in)	Design Thickness (in)	Tensile Strength (KSI)	Coating	Web (in)	Flange (in)	Stud Spacing (O.C.)	Standard Packaging
<b>TBLK362-300-S12-30</b>	20	0.0296	0.0312	33	G40	3-5/8"	3"	12"	"10pc Bundles"
<b>TBLK362-300-S16-30</b>	20	0.0296	0.0312	33	G40	3-5/8"	3"	16"	
<b>TBLK362-300-S24-30</b>	20	0.0296	0.0312	33	G40	3-5/8"	3"	24"	
<b>TBLK362-300-S12-54</b>	16	0.0538	0.0566	50	G60	3-5/8"	3"	12"	
<b>TBLK362-300-S16-54</b>	16	0.0538	0.0566	50	G60	3-5/8"	3"	16"	
<b>TBLK362-300-S24-54</b>	16	0.0538	0.0566	50	G60	3-5/8"	3"	24"	
<b>TBLK600-300-S12-30</b>	20	0.0296	0.0312	33	G40	6"	3"	12"	
<b>TBLK600-300-S16-30</b>	20	0.0296	0.0312	33	G40	6"	3"	16"	
<b>TBLK600-300-S24-30</b>	20	0.0296	0.0312	33	G40	6"	3"	24"	
<b>TBLK600-300-S12-54</b>	16	0.0538	0.0566	50	G60	6"	3"	12"	
<b>TBLK600-300-S16-54</b>	16	0.0538	0.0566	50	G60	6"	3"	16"	
<b>TBLK600-300-S24-54</b>	16	0.0538	0.0566	50	G60	6"	3"	24"	

T-Block Item No.	Minimum Thickness (in)	Design Thickness (in)	Tensile Strength (KSI)	Web (in)	Flange (in)	Max Stud Spacing (O.C.)	Stud & Track	Allowable Load (lbf)
<b>TBLK362-300-30</b>	0.0296	0.0312	33	3-5/8"	3"	16"	20 ga (30 mil) Fy=33 ksi	Horizontal: 249 lbf Vertical: 339 lbs
<b>TBLK362-300-54</b>	0.0538	0.0566	50	3-5/8"	3"	16"	12 ga (97 mil) Fy=50 ksi	Horizontal: 647 lbf Vertical: 692 lbs
							16 ga (54 mil) Fy=50 ksi	Horizontal: 648 lbf Vertical: 926 lbs
							20 ga (30 mil) Fy=33 ksi	Horizontal: 288 lbf Vertical: 396 lbs

Blocking is connected to studs with (1) #10-16 screw at each flange

Allowable Loads were determined based on the test results and 3rd party PE reliability analysis per AISI S100-16 Chapter K

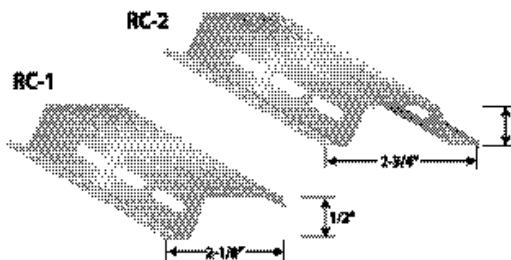

Product	Length	Wt./Ft.	Pcs./Ctn.	Ft./Ctn.
RC-1	12'	0.20	40	480
RC-2		0.24		

#### Product Data:

- RC-1: Single Leg
- RC-2: Double Leg
- Gauge: Standard 25 gauge conforming to ASTM A-653 and C-645
- Lengths: 12' 0" stock length
- RC-1: Screw attachment, one side only
- RC-2: Screw attachment, both sides

#### Uses:

- Used as cross furring members for resilient attachment of gypsum wallboard or lath on ceilings and partitions
- Decreased sound transmission through wall partitions and ceilings up to 13%

#### Supreme Tested Assemblies

All acoustical data was independently tested by Riverbank Acoustical Laboratories. Riverbank Acoustical is a nationally recognized company accredited by the National Institute of Standards and Technology (NIST) through the National Voluntary Laboratory Accreditation Program (NVLAP).

**RiverbankAcoustical**  
L A B O R A T O R I E S

#### Partition Specifications


Partition Type	Side A	Side B	Gypsum Type	Insulation Type	Stud Spacing	STC Rating
1	1 layer	1 layer	5/8" Type X	-	24" oc	38
2	1 layer	1 layer	5/8" Type X	R-11 insulated	24" oc	47
3	1 layer	1 layer on RC-1	5/8" Type X	R-11 insulated	24" oc	52
4	2 layers	2 layers on RC-1	5/8" Type X	R-11 insulated	24" oc	61

#### Typical RC-1 Installation Instructions for Walls

- Bottom RC-1 installed with mounting leg turned up, spaced 2" up from top track leg.
- Top RC-1 installed with mounting leg turned down, spaced 6" down from track leg.
- Middle RC-1 installed with mounting leg turned down, spaced 24" apart.
- Please reference Gypsum Association's GA-216 guidelines.

#### Typical RC-1 Installation Instructions for Ceilings

- When RC-1 is installed on a ceiling, it should be installed perpendicular to the joists.
- RC-1 should be installed on ceilings with the open side facing the same direction across the entire ceiling.
- RC-1 on ceilings should be installed with a maximum of 6" spacing out from a wall.
- 16" OC joist spacing use 24" RC-1 spacing. 24" OC joist spacing use 16" RC-1 spacing.
- RC-1 can be overlapped at a support location with a minimum of 4" overlap.
- No more than two 5/8" gypsum boards should be fastened to an RC-1 channel with a maximum load of 5 lbs per SF.

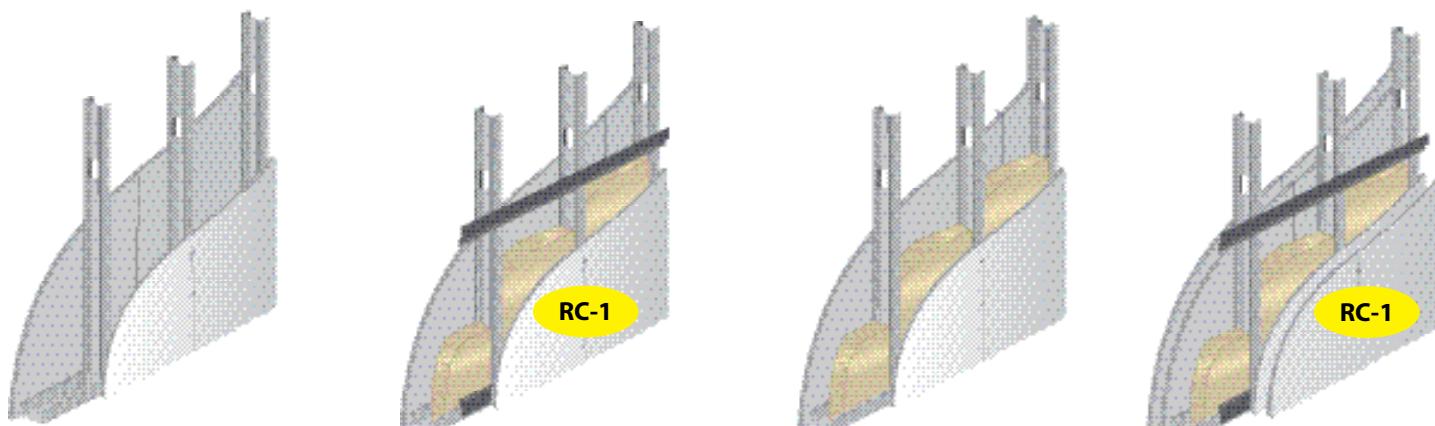

**Partition Type 1**

38 STC  
3 5/8" Stud

**Partition Type 3**

52 STC  
3 5/8" Stud

**Partition Type 2**


47 STC  
3 5/8" Stud

**Partition Type 4**

61 STC  
3 5/8" Stud

# LIGHT GAUGE METAL FRAMING ACCESSORIES - MISCELLANEOUS

## (ZFC) Z-FURRING CHANNEL Product Data:

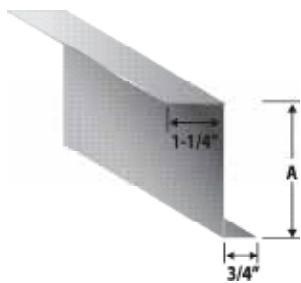

- Available in hot-dipped galvanized steel conforming to ASTM A-653 and C-645
- Gauges: Standard 25 gauge, (available in 20, 18, and 16 gauge upon request)
- Lengths: Standard 10'0" and 8'6" lengths, (other lengths available upon request)

### Uses:

- Designed to accommodate the installation of rigid insulation board while providing an attachment for drywall or other facing materials to the interior side of masonry or monolithic concrete walls

Product	(A) in. Size	25 Ga. Wt./Ft.
Z-100	1.00	0.195
Z-150	1.50	0.225
Z-200	2.00	0.260

## (RT) REVEAL TRIM



### Product Data:

- An economical steel channel
- No joint cement required

### Uses:

- Provides edge protection around doors and windows or any partition junction openings

Product	Size Depth	Length (ft.)	Pcs./Ctn.	Ft./Ctn.
RT-50, RT-62	1/2" & 5/8"	8'; 10'	63, 50	504, 500

Custom lengths and UPS labeling available upon request

## 093 EXPANSION CONTROL JOINT



### Product Data:


- Manufacturing from the highest quality pure zinc coil stock for superior corrosion resistance
- Fits standard 1/4" openings

### Uses:

- Product is excellent for interior or exterior applications

Product	Length (ft.)	Pcs./Ctn.	Ft./Ctn.
093	10'	25	250

## (CLT) CUSTOM LEG TRACK

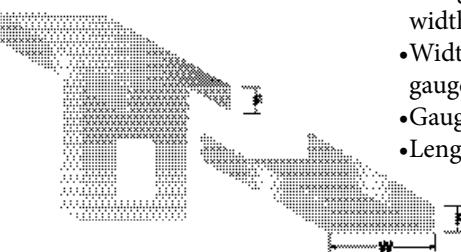


### Product Data:

- Designation: CLT or VST width x gauge
- Widths: Multiple sizes and gauges available
- Gauge: Multiple sizes available
- Lengths: Standard 10'

### Uses:

- CLT used for standard built construction with channel or bracing attached within 2' of track member to each stud
- For attachment at top of infill curtain wall systems to primary frame; allows for one half inch of live load deflection or settlement of the primary fram without transferring the load to the exterior wall while bracing the wall against lateral forces
- Variable width and height for track-in-track application such as panel construction

## (WS) WEB STIFFENERS

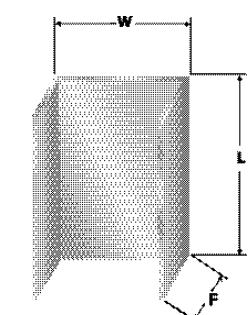


### Product Data:

- Designation: WS W x F x gauge
- Length: 4, 6, 7-1/4, 8, 9-1/4, 10, 12 inch
- Galvanized finish
- For axial capacities contact Telling Industries Engineering

### Uses:

- For web reinforcement of C shaped framing members
- Allow transfer of axial loads through joists at bearing condistions of platform frames

## UTILITY ANGLE/ROLLED ANGLE (RA)

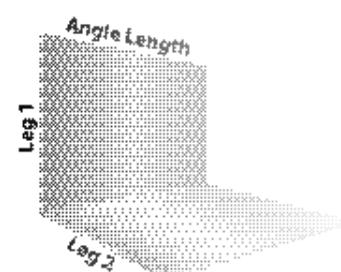

### Uses:

- For miscellaneous attachments of intersection framing components
- For attachment of joist framing components to flush mounted headers
- For attachment of solid blocking sections to adjacent studs of joists
- For alternate screw attachment of CRC bridging to stud webs in lieu direct weld
- For 90 degree corner enclosures at lapped framing location; provides in-plane stability of framework


Note: 4 Screws min.

**Product Data:**

- UL Classified in over 80 approved fire-rated systems
- Meets movement and cycling requirements for ANSI/UL 2079
- Custom web, leg and lengths are available  
(Custom slot sizes are not available)
- Integrated with traditional wall systems
- Easy installation reduces labor costs

**Uses:**

- Fire-rated deflection system
- Positive attachment provided for wall strength
- Standard Slotted Track allows vertical movement
- Absorbs head-of-wall and floor extension or compression movement

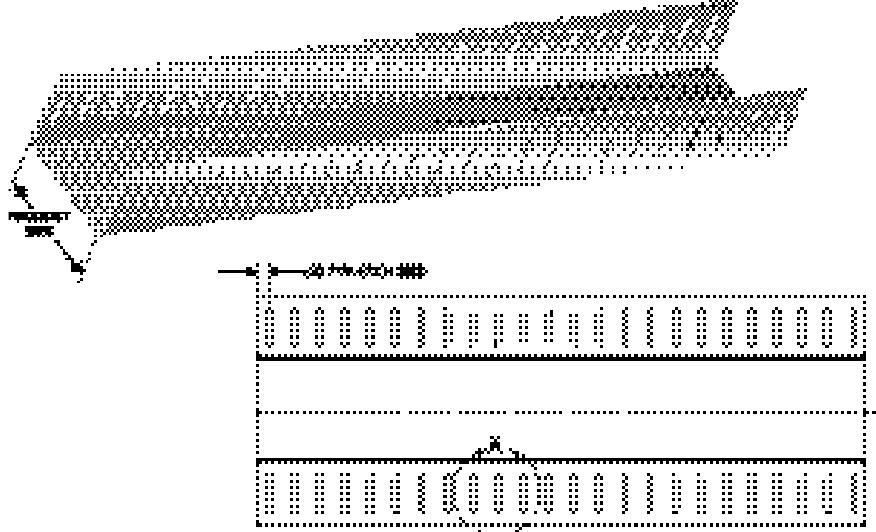
**2.5" SLOTTED TRACK****Product Sizes:**

- Max Web: 8"
- Flange: 2.5"

**Material Gauges**

- .030" Minimum
- .071" Maximum


**SEE THE VIDEO**

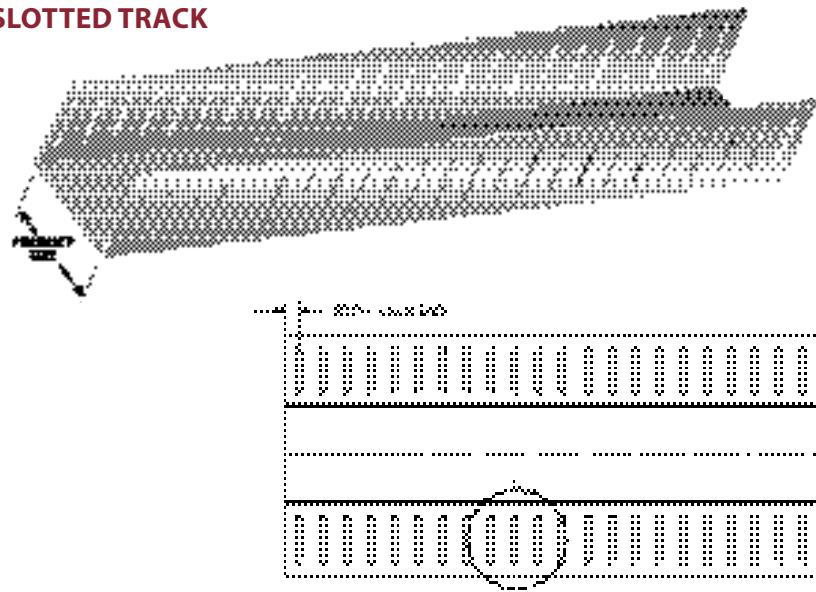**3" SLOTTED TRACK****Product Sizes:**

- Max Web: 8"
- Flange: 3"

**Material Gauges**

- .030" Minimum
- .071" Maximum

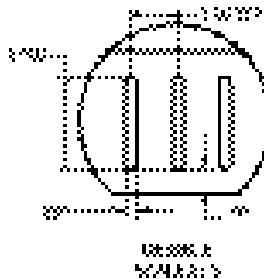**ALLOWABLE WALL HEIGHTS (ft)**

Gauge Mill Thickness (mils)	Design Thickness (in)	Strength Fy (ksi)	Allowable Reaction (lb/stud)	Lateral Pressure (PSF)											
				5 PSF			10 PSF			20 PSF			30 PSF		
				Stud Spacing (in)	12	16	24	Stud Spacing (in)	12	16	24	Stud Spacing (in)	12	16	24
33	.0346	33	98	39.2	29.4	19.6	19.6	14.7	9.8	9.8	7.35	4.9	6.533	4.9	3.267
43	.0451	33	172	68.8	51.6	34.4	34.4	25.8	17.2	17.2	12.9	8.6	11.47	8.6	5.733
54	.0566	50	423	169.2	126.9	84.6	84.6	63.45	42.3	42.3	31.73	21.15	28.2	21.15	14.1
68	.0713	50	626	250.4	187.8	125.2	125.2	93.9	62.6	62.6	46.95	31.3	41.73	31.3	20.87

**Note:** 1. Based on testing and analysis by Structural Testing and Research (STaR) Report No. 3160903 dated March 29, 2010 (Amended May 19, 2010).

2. Testing based on maximum 7/8" gap between end of stud and track web.

3. Testing based on #8 screws each leg for 33-mil track, #10 each leg for 43, 54 and 68-mil track. All screws were pan head, 0.43 inch head diameter.

4. Loads have not been modified for duration of load.



## TELLING 2.5" SLOTTED TRACK SECTION PROPERTIES

Section	Design Thickness (in)	Fy (ksi)	Gross Properties <sup>1</sup>							Effective Properties <sup>4,5</sup>		
			Area (in <sup>2</sup> )	Net Area <sub>2</sub> (in <sup>2</sup> )	Wt. <sup>3</sup> (lb/ft)	I <sub>xx</sub> (in <sup>4</sup> )	R <sub>x</sub> (in)	I <sub>yy</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)	S <sub>yy</sub> (in <sup>4</sup> )	S <sub>yx</sub> (in <sup>3</sup> )	M <sub>avx</sub> (in-k)
250TAT250-30	0.0312	33	0.234	0.140	0.86	0.160	0.826	0.306	1.143	0.116	0.079	1.55
250TAT250-33	0.0346	33	0.259	0.156	0.88	0.178	0.827	0.339	1.144	0.129	0.087	1.72
250TAT250-43	0.0451	33	0.338	0.203	1.15	0.230	0.826	0.443	1.146	0.168	0.113	2.23
250TAT250-54	0.0566	50	0.424	0.254	1.44	0.287	0.824	0.565	1.155	0.213	0.141	4.22
250TAT250-68	0.0713	50	0.534	0.32	1.82	0.360	0.821	0.728	1.168	0.273	0.177	5.29
350TAT250-33	0.0346	33	0.294	0.19	1	0.198	0.821	0.687	1.528	0.286	0.138	2.73
350TAT250-43	0.0451	33	0.383	0.248	1.3	0.257	0.819	0.896	1.53	0.373	0.185	3.66
350TAT250-54	0.0566	50	0.48	0.311	1.63	0.321	0.817	1.137	1.538	0.471	0.232	6.93
350TAT250-68	0.0713	50	0.605	0.391	2.06	0.401	0.814	1.454	1.55	0.598	0.29	8.69
362TAT250-30	0.0312	33	0.269	0.175	0.92	0.181	0.820	0.667	1.575	0.281	0.126	2.49
362TAT250-33	0.0346	33	0.298	0.194	1.01	0.200	0.820	0.740	1.575	0.312	0.144	2.85
362TAT250-43	0.0451	33	0.389	0.253	1.32	0.260	0.818	0.966	1.577	0.406	0.195	3.86
362TAT250-54	0.0566	50	0.487	0.318	1.66	0.324	0.816	1.224	1.585	0.512	0.244	7.32
362TAT250-68	0.0713	50	0.614	0.4	2.09	0.406	0.813	1.565	1.597	0.65	0.306	9.17
400TAT250-30	0.0312	33	0.281	0.187	0.96	0.187	0.816	0.824	1.713	0.354	0.142	2.80
400TAT250-33	0.0346	33	0.311	0.207	1.06	0.207	0.815	0.914	1.714	0.396	0.162	3.21
400TAT250-43	0.0451	33	0.405	0.27	1.38	0.268	0.813	1.193	1.715	0.516	0.227	4.49
400TAT250-54	0.0566	50	0.509	0.339	1.73	0.335	0.811	1.511	1.723	0.65	0.284	8.51
400TAT250-68	0.0713	50	0.641	0.427	2.18	0.418	0.808	1.928	1.735	0.825	0.356	10.67
550TAT250-33	0.0346	33	0.363	0.259	1.24	0.228	0.792	1.839	2.251	0.837	0.236	4.66
550TAT250-43	0.0451	33	0.473	0.338	1.61	0.295	0.79	2.399	2.252	1.142	0.34	6.72
550TAT250-54	0.0566	50	0.594	0.424	2.02	0.368	0.788	3.029	2.259	1.436	0.43	12.87
550TAT250-68	0.0713	50	0.748	0.534	2.54	0.46	0.785	3.849	2.269	1.817	0.584	17.48
600TAT250-30	0.0312	33	0.343	0.250	1.17	0.211	0.784	2.016	2.424	0.904	0.224	4.44
600TAT250-33	0.0346	33	0.380	0.277	1.29	0.233	0.783	2.236	2.424	1.026	0.26	5.14
600TAT250-43	0.0451	33	0.496	0.36	1.69	0.303	0.781	2.916	2.425	1.407	0.378	7.47
600TAT250-54	0.0566	50	0.622	0.452	2.12	0.377	0.779	3.678	2.432	1.777	0.478	14.31
600TAT250-68	0.0713	50	0.783	0.569	2.67	0.472	0.776	4.67	2.442	2.266	0.655	19.61
800TAT250-30	0.0312	33	0.406	0.312	1.38	0.227	0.749	3.894	3.099	1.752	0.307	6.07
800TAT250-33	0.0346	33	0.450	0.346	1.53	0.252	0.748	4.318	3.099	2.003	0.358	7.07
800TAT250-43	0.0451	33	0.586	0.451	1.99	0.326	0.746	5.629	3.1	2.801	0.53	10.47
800TAT250-54	0.0566	50	0.735	0.565	2.5	0.407	0.744	7.09	3.106	3.54	0.671	20.1
800TAT250-68	0.0713	50	0.926	0.712	3.15	0.509	0.741	8.978	3.114	4.698	0.942	28.21

## TELLING 3.0" SLOTTED TRACK SECTION PROPERTIES


Section	Design Thickness (in)	Fy (ksi)	Gross Properties <sup>1</sup>							Effective Properties <sup>4,5</sup>		
			Area (in <sup>2</sup> )	Net Area <sub>2</sub> (in <sup>2</sup> )	Wt. <sup>3</sup> (lb/ft)	I <sub>xx</sub> (in <sup>4</sup> )	R <sub>x</sub> (in)	I <sub>yy</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)	I <sub>ly</sub> (in <sup>4</sup> )	S <sub>yy</sub> (in <sup>3</sup> )	May (in-k)
250TAT300-30	0.0312	33	0.265	0.140	0.902	0.262	0.993	0.359	1.163	0.188	0.104	1.711
250TAT300-33	0.0346	33	0.294	0.156	1.00	0.290	0.993	0.398	1.164	0.215	0.120	1.974
250TAT300-43	0.0451	33	0.383	0.203	1.30	0.376	0.991	0.521	1.166	0.306	0.174	2.874
250TAT300-54	0.0566	50	0.480	0.254	1.63	0.470	0.989	0.664	1.176	0.397	0.224	6.712
250TAT300-68	0.0713	50	0.605	0.320	2.06	0.589	0.987	0.856	1.190	0.559	0.321	9.616
350TAT300-33	0.0346	33	0.329	0.190	1.12	0.324	0.992	0.799	1.560	0.457	0.190	3.139
350TAT300-43	0.0451	33	0.428	0.248	1.46	0.420	0.991	1.044	1.562	0.648	0.277	4.563
350TAT300-54	0.0566	50	0.537	0.311	1.83	0.525	0.989	1.324	1.570	0.833	0.354	10.601
350TAT300-68	0.0713	50	0.676	0.391	2.30	0.657	0.986	1.695	1.583	1.150	0.497	14.887
362TAT300-30	0.0312	33	0.300	0.175	1.02	0.296	0.992	0.776	1.607	0.414	0.162	2.668
362TAT300-33	0.0346	33	0.333	0.195	1.13	0.327	0.992	0.861	1.608	0.491	0.197	3.256
362TAT300-43	0.0451	33	0.434	0.253	1.48	0.425	0.990	1.124	1.610	0.701	0.291	4.795
362TAT300-54	0.0566	50	0.544	0.318	1.85	0.531	0.988	1.425	1.619	0.901	0.372	11.134
362TAT300-68	0.0713	50	0.685	0.400	2.33	0.665	0.985	1.823	1.631	1.242	0.521	15.604
400TAT300-30	0.0312	33	0.312	0.187	1.06	0.305	0.989	0.956	1.751	0.507	0.179	2.957
400TAT300-33	0.0346	33	0.346	0.208	1.18	0.338	0.989	1.061	1.751	0.601	0.219	3.609
400TAT300-43	0.0451	33	0.451	0.270	1.53	0.439	0.987	1.384	1.753	0.878	0.334	5.517
400TAT300-54	0.0566	50	0.565	0.339	1.92	0.548	0.985	1.754	1.761	1.126	0.427	12.795
400TAT300-68	0.0713	50	0.712	0.427	2.42	0.686	0.982	2.239	1.774	1.544	0.596	17.831
550TAT300-33	0.0346	33	0.398	0.259	1.35	0.374	0.969	2.112	2.304	1.156	0.303	5.002
550TAT300-43	0.0451	33	0.518	0.338	1.76	0.485	0.968	2.755	2.306	1.795	0.511	8.430
550TAT300-54	0.0566	50	0.650	0.424	2.21	0.606	0.965	3.479	2.313	2.320	0.664	19.883
550TAT300-68	0.0713	50	0.819	0.534	2.79	0.758	0.962	4.424	2.324	3.175	0.930	27.853
600TAT300-30	0.0312	33	0.374	0.250	1.27	0.347	0.962	2.307	2.483	1.168	0.272	4.491
600TAT300-33	0.0346	33	0.415	0.277	1.41	0.384	0.962	2.559	2.483	1.383	0.331	5.463
600TAT300-43	0.0451	33	0.541	0.360	1.84	0.498	0.960	3.337	2.484	2.144	0.557	9.184
600TAT300-54	0.0566	50	0.679	0.452	2.31	0.622	0.957	4.212	2.492	2.770	0.723	21.652
600TAT300-68	0.0713	50	0.855	0.569	2.91	0.778	0.955	5.351	2.502	3.883	1.055	31.582
800TAT300-30	0.0312	33	0.437	0.312	1.49	0.376	0.928	4.407	3.177	2.121	0.365	6.029
800TAT300-33	0.0346	33	0.484	0.346	1.65	0.416	0.927	4.887	3.177	2.512	0.444	7.320
800TAT300-43	0.0451	33	0.631	0.451	2.15	0.540	0.925	6.372	3.178	3.880	0.738	12.173
800TAT300-54	0.0566	50	0.792	0.565	2.69	0.675	0.923	8.028	3.184	5.001	0.957	28.659
800TAT300-68	0.0713	50	0.997	0.712	3.39	0.844	0.920	10.171	3.194	7.471	1.551	46.447

**Notes:** 1. Gross properties are based on the full section away from flange slots. 2. Net area is based on the section through the flange slots. 3. Weight is nominal weight of the gross section, not reduced for flange slots. 4. Effective properties are calculated in accordance with the 2007 NASPEC with 2010 Supplement (AISI S100-07/S2-10). For effective flange widths, the compression flange (before local buckling) is taken as the portion of the flange between the web and the slot (the slot and any steel beyond the slot is considered absent). The tension flange is taken as the net flange at the slots. 5. Cold-work of forming has not been considered for effective properties. 6. Web width-to-thickness ratio exceeds 200. Web stiffeners are required at points of concentrated loads or reactions. 7. IBC 2006, 2009, and 2012 compliant.



## Product Data:

- Material Specifications: ASTM 1003, Grade 50
- one piece wide flange header and jamb
  - Widths: 3-5/8", 4", 6", & 8"
  - Flanges: 2, 2-1/2" & 3"
  - Lip/Return: 7/8"
  - Thickness:
    - 54 mils (16ga) 50KSI
    - 68 mils (14ga) 50KSI
    - 97 mils (12ga) 50KSI

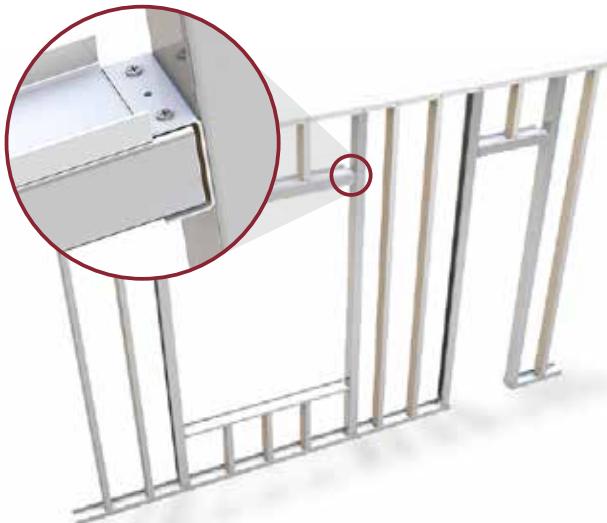


**CLICK HERE  
TO WATCH THE  
INSTALLATION  
VIDEO**



## Uses:

- The Titan one piece wide flange header and jamb offers a better solution for framing multiple openings than the conventional lay-in or boxed headers
- Saves over 50% in installation and material over convention framing
- No more built-up jambs and headers
- Header quickly attaches to jamb with fully tested, pre-drilled Titan Header Clip

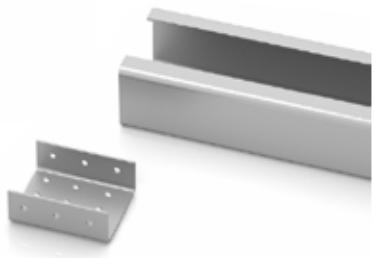

Physical Properties				Gross Properties								Effective Properties								Torsional Properties					
Section	Thickness (in)	Lip (in)	Fy (ksi)	Area (in²)	Weight (lb/ft)	Ix (in⁴)	Sx (in³)	Rx (in)	Iy (in⁴)	Sy (in³)	Ry (in)	Ixe (in⁴)	Sxe (in³)	Max (in-k)	Vax (web) (lb)	Iye (in⁴)	Sye (in³)	May (in-k)	Vay (flanges) (lb)	Jx1000 (in⁴)	Cw (in⁶)	Xo (in)	m (in)	Ro (in)	B
<b>362TH250-54</b>	0.0566	0.875	50	0.563	1.917	1.242	0.685	1.485	0.535	0.362	0.975	1.242	0.589	17.64	3372	0.422	0.314	9.40	4706	0.602	2.137	-2.373	1.381	2.964	0.359
<b>362TH250-68</b>	0.0713	0.875	50	0.702	2.389	1.531	0.845	1.477	0.656	0.443	0.967	1.531	0.781	23.37	4370	0.534	0.404	12.10	5731	1.190	2.612	-2.355	1.371	2.943	0.360
<b>362TH250-97</b>	0.1017	0.875	50	0.978	3.329	2.085	1.150	1.460	0.882	0.595	0.950	2.085	1.134	38.15	5943	0.714	0.547	16.37	7595	3.373	3.497	-2.317	1.351	2.898	0.361
<b>362TH300-54</b>	0.0566	0.875	50	0.620	2.110	1.422	0.785	1.515	0.822	0.469	1.151	1.386	0.628	18.81	3372	0.653	0.408	12.20	5767	0.662	3.237	-2.860	1.640	3.435	0.307
<b>362TH300-68</b>	0.0713	0.875	50	0.773	2.631	1.756	0.969	1.507	1.010	0.576	1.143	1.756	0.812	24.31	4370	0.828	0.525	15.70	7068	1.310	3.965	-2.841	1.630	3.413	0.307
<b>362TH300-97</b>	0.1017	0.875	50	1.080	3.675	2.400	1.324	1.491	1.368	0.779	1.126	2.400	1.259	37.68	5943	1.115	0.715	21.41	9502	3.723	5.337	-2.803	1.610	3.369	0.307
<b>400TH250-54</b>	0.0566	0.875	50	0.585	1.989	1.556	0.778	1.632	0.555	0.366	0.975	1.556	0.662	19.82	3372	0.432	0.321	9.60	4706	0.624	2.519	-2.311	1.355	2.992	0.404
<b>400TH250-68</b>	0.0713	0.875	50	0.729	2.480	1.920	0.960	1.623	0.681	0.449	0.967	1.920	0.880	26.33	4871	0.563	0.408	12.22	5731	1.235	3.081	-2.292	1.345	2.971	0.405
<b>400TH250-97</b>	0.1017	0.875	50	1.016	3.459	2.621	1.311	1.606	0.917	0.603	0.950	2.621	1.296	43.59	6658	0.762	0.562	16.82	7595	3.504	4.135	-2.254	1.325	2.926	0.406
<b>400TH300-54</b>	0.0566	0.875	50	0.641	2.182	1.777	0.888	1.664	0.852	0.476	1.153	1.734	0.705	21.11	3372	0.667	0.415	12.43	5767	0.685	3.819	-2.792	1.613	3.449	0.345
<b>400TH300-68</b>	0.0713	0.875	50	0.800	2.722	2.195	1.098	1.657	1.048	0.584	1.145	2.195	0.913	27.33	4871	0.870	0.530	15.85	7068	1.356	4.683	-2.774	1.603	3.428	0.345
<b>400TH300-97</b>	0.1017	0.875	50	1.118	3.805	3.007	1.504	1.640	1.421	0.791	1.127	3.007	1.430	42.81	6658	1.858	0.735	21.99	9502	3.855	6.317	-2.735	1.583	3.383	0.346
<b>600TH250-54</b>	0.0566	0.875	50	0.698	2.375	3.963	1.321	2.383	0.642	0.384	0.959	3.963	1.203	32.21	2823	0.455	0.329	9.84	4706	0.745	5.344	-2.031	1.230	3.275	0.615
<b>600TH250-68</b>	0.0713	0.875	50	0.871	2.965	4.908	1.636	2.373	0.788	0.471	0.951	4.908	1.551	43.46	5350	0.610	0.417	12.48	5731	1.476	6.563	-2.013	1.221	3.254	0.617
<b>600TH250-97</b>	0.1017	0.875	50	1.220	4.151	6.754	2.251	2.353	1.063	0.635	0.934	6.754	2.251	73.36	10472	0.928	0.590	17.66	7595	4.205	8.880	-1.976	1.201	3.211	0.622
<b>600TH300-54</b>	0.0566	0.875	50	0.754	2.567	4.462	1.488	2.432	0.986	0.501	1.143	4.390	1.277	33.68	2823	0.700	0.425	12.72	5767	0.806	8.115	-2.483	1.481	3.659	0.539
<b>600TH300-68</b>	0.0713	0.875	50	0.943	3.207	5.534	1.845	2.423	1.214	0.616	1.135	5.534	1.610	45.70	5350	0.937	0.541	16.19	7068	1.597	9.992	-2.465	1.471	3.638	0.541
<b>600TH300-97</b>	0.1017	0.875	50	1.322	4.497	7.639	2.546	2.404	1.649	0.835	1.117	7.639	2.442	71.74	10472	1.431	0.771	23.09	9502	4.556	13.587	-2.427	1.451	3.594	0.544
<b>800TH250-54</b>	0.0566	0.875	50	0.811	2.760	7.765	1.941	3.094	0.705	0.395	0.932	7.765	1.756	44.21	2091	0.463	0.330	9.88	4706	0.866	9.639	-1.818	1.130	3.708	0.759
<b>800TH250-68</b>	0.0713	0.875	50	1.014	3.450	9.638	2.409	3.083	0.865	0.485	0.924	9.638	2.291	60.19	4221	0.628	0.420	12.57	5731	1.718	11.864	-1.801	1.120	3.688	0.762
<b>800TH300-97</b>	0.1017	0.875	50	1.423	4.843	13.327	3.332	3.060	1.167	0.654	0.906	13.327	3.332	103.13	10885	0.977	0.598	17.89	7595	4.907	16.123	-1.765	1.102	3.647	0.766
<b>800TH300-54</b>	0.0566	0.875	50	0.868	2.952	8.657	2.164	3.159	1.085	0.517	1.118	8.579	1.826	45.96	2091	0.712	0.427	12.78	5767	0.927	14.643	-2.244	1.372	4.033	0.690
<b>800TH300-68</b>	0.0713	0.875	50	1.085	3.693	10.758	10.758	3.149	1.336	0.636	1.110	10.758	2.371	62.83	4221	0.962	0.545	16.30	7068	1.839	18.066	-2.226	1.363	4.012	0.692
<b>800TH300-97</b>	0.1017	0.875	50	1.525	5.189	14.913	3.728	3.127	1.817	0.863	1.092	14.913	3.576	100.11	10885	1.502	0.781	23.39	9502	5.257	24.677	-2.188	1.343	3.970	0.696

1. Section properties are based on the AISI S100-07 with Supplement S2-10 with U.S. provisions.

2. The structural properties are based on allowable strength design (ASD).

3. The distortional buckling calculations are based on  $K\Phi=0$ .

4. Effective properties incorporate the strength increase from the cold work of forming.


5. Tabulated gross properties are based on the full-unreduced cross section away from punch outs.

Header Size		Titan Header Clip Allowable Load Capacity			
Web Depth (in)	Flange Width (in)	Vertical Load (lbs)	Horizontal Load (lbs)		
03-5/8		1140	1520		
6	2-1/2	1140	1740		
8		1140	1930		
3-5/8		1140	1520		
6	3	1140	1740		
8		1140	1930		


866.372.6384

**VERSADRY DRYWALL TRACK SYSTEM**

Patented system allows the installation of drywall to sit 2 inches off the floor on a steel shelf. This shelf mitigates the wicking of water both during construction and the life of the building.

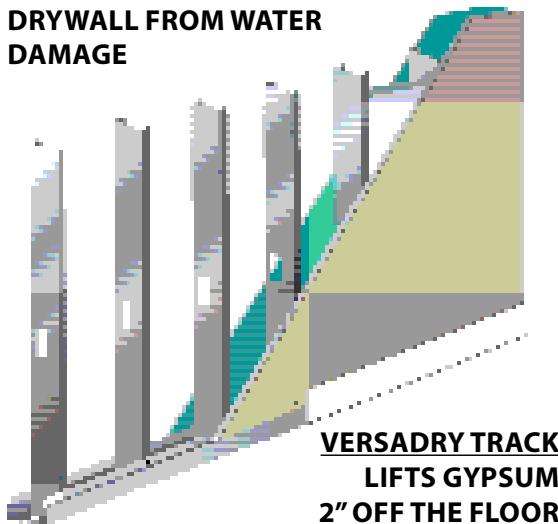
**VERSADRY TRACK PROTECTS  
DRYWALL FROM WATER  
DAMAGE**

**Wall damage  
without Versadry**
**IMPROVED AESTHETICS**

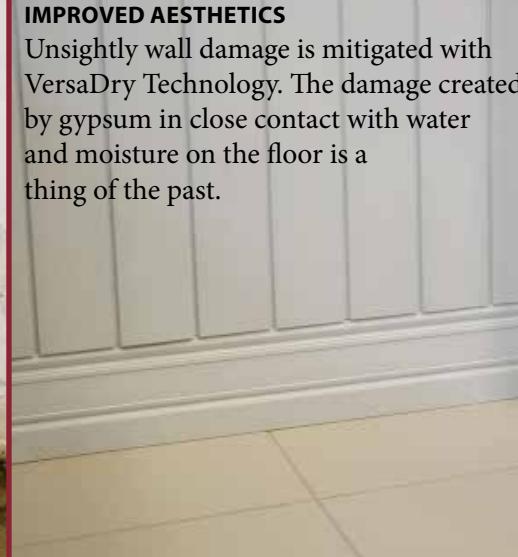Unsightly wall damage is mitigated with VersaDry Technology. The damage created by gypsum in close contact with water and moisture on the floor is a thing of the past.

**VERSADRY TRACK: 2 PIECE DESIGN (Ideal for retrofits)**

Thickness Nomenclature	Non-Rate Length	1 Hour Rated	2 Hour Rated	Min Base Metal Thickness (in)	Design Thickness (in)	Min Yield Strength (ksi)	Standard Galvanization	Web Sizes (in)
VDT2-18	24'	10'	10'	0.0179"	0.0186"	33 ksi	G40	2 piece design. Any web size is possible
VDT2-30	12'	N/A	N/A	0.0296"	0.0312"			

**VERSADRY TRACK: 1 PIECE DESIGN (Ideal for new construction)**

Thickness Nomenclature	Non-Rate Length	1 Hour Rated + Clip	2 Hour Rated + Clip	Min Base Metal Thickness (in)	Design Thickness (in)	Min Yield Strength (ksi)	Standard Galvanization	Web Sizes (in)
VDT1-18	Max 24'	Max 24' Length (10' Recommended)		0.0179"	0.0186"	33 ksi	G40	3-5/8", 4", 5.5", 6"
VDT1-30				0.0296"	0.0312"			

**VERSADRY DIMENSIONS**

	Gypsum Ledge Height	Gypsum Ledge Width
Non-Rated	2.00"	0.688"
1 Hour Fire Rated	2.00"	0.688"
2 Hour Fire Rated	2.00"	1.295"

- KEEPS GYPSUM DRY
- IMPROVED FIRE RESISTANCE WITHOUT CAULK
- IMPROVED ACOUSTICAL PERFORMANCE
- ELEGANT FINAL FIT AND FINISHED APPEARANCE
- HELPS REDUCE MOLD GROWTH

**VERSADRY TRACK CERTIFICATIONS:****FIRE RESISTANCE:**

3rd party tested to meet a 1 hour & 2 hour Fire Rating for UL Wall Design U423 per ASTM E119

- 1 hour Fire Rating for UL Wall Design U423 per ASTM E119 with 18mil Versadry Track, 1 layer of 5/8" Type X Gypsum, & 20ga 3-5/8" studs spaced 16"OC.
- 2 hour Fire Rating for UL Wall Design U423 per ASTM E119 with 18mil Versadry Track, 2 layers of 5/8" Type X Gypsum, & 20ga 3-5/8" studs spaced 16"OC.
- Versadry 1 piece design with clip at floor & ceiling passed ASTM E119 1-hour and 2-hour fire and hose stream test without caulk at Intertek certified independent 3rd party test lab.

**ACOUSTICAL PERFORMANCE:**


3rd part tested per ASTM E90-09 and calculated per ASTM E413-16.

- STC = 45 for Non-Fire Rated 18mil VersaDry Track w/ 1 layer of 5/8" Type X Gypsum
- STC = 48 for Non-Fire Rated 18mil VersaDry Track w/ 1 layer of Impact Resistant Gypsum
- STC = 46 for 1 hour Fire Rated 18mil VersaDry Track w/ 1 layer of Impact Resistant Gypsum
- STC = 53 for 2 hour Fire Rated 18mil VersaDry Track w/ 2 layers of 5/8" Type X Gypsum

**CLICK HERE  
TO WATCH  
THE VIDEO**




**VERSADRY  
2-PIECE DESIGN  
NOW AVAILABLE**

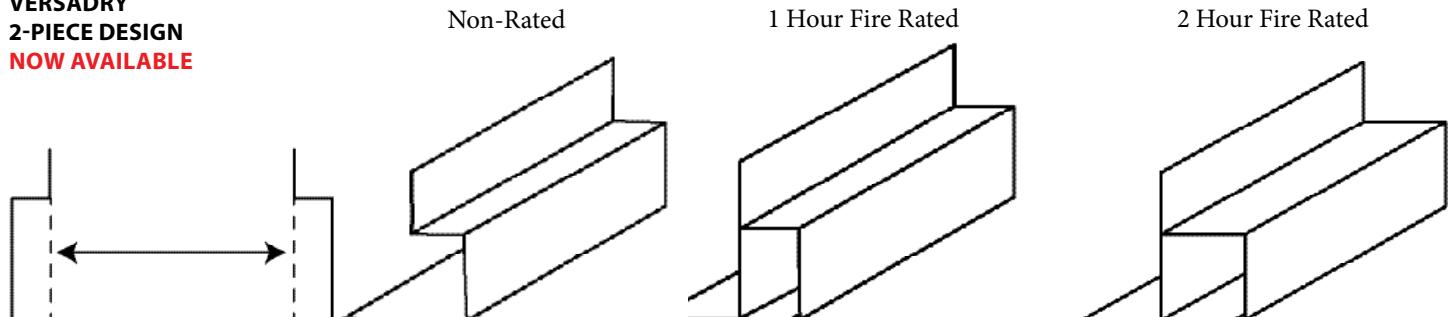


195-NRVDT2

125-1HRVDT2


125-2HRVDT2

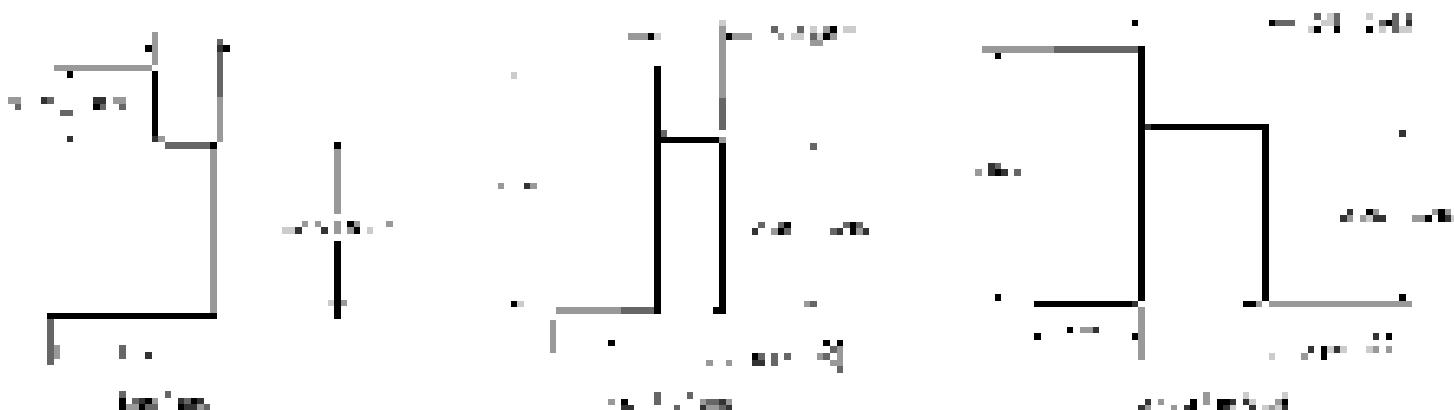

**1-PIECE DESIGN  
NOW AVAILABLE**

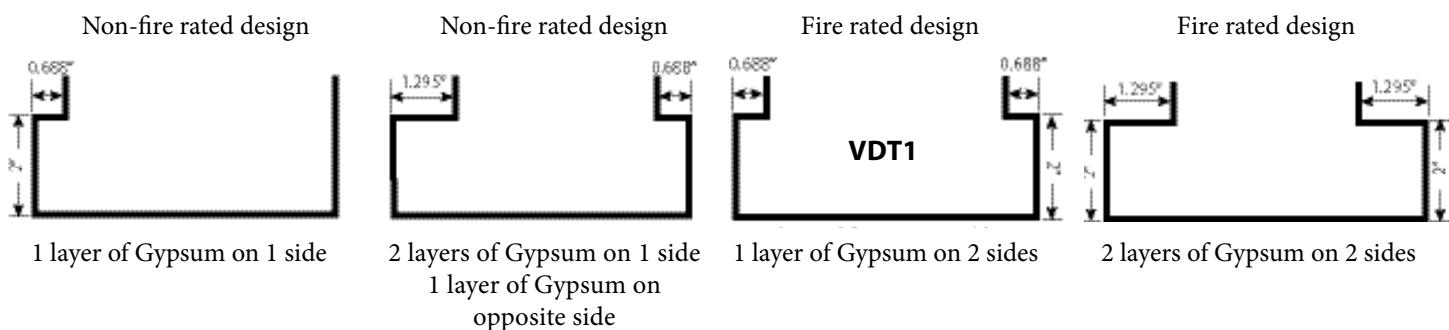

VersaDry with clip at floor without caulk

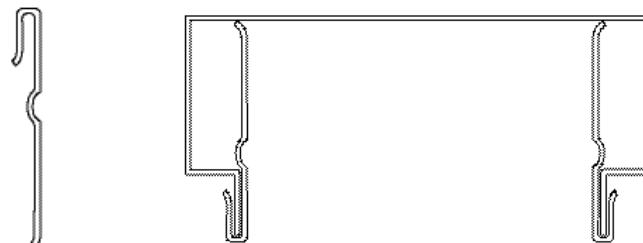

VersaDry with clip at ceiling without caulk

**VERSADRY**  
DRYWALL TRACK

KEEPS GYPSUM DRY

ELEGANT FIT & FINISH

IMPROVES ACCOUSTICAL PERFORMANCE

HELPS REDUCE MOLD GROWTH

IMPROVES FIRE RESISTANCE

DESIGN YOUR BUILDING TO PERFORM!

NO CAULK NEEDED  
SAVES \$\$\$

**HOSPITALS**

**SCHOOLS**

**APARTMENTS**

**KITCHENS**

**POTENTIAL WET ENVIRONMENTS**

**HOSPITALITY**

**TELLING** **THE LEADER IN METAL FRAMING INNOVATION**

[www.BuildStrong.com](http://www.BuildStrong.com) • 1-866-372-6384





# TELLING ENGINEERING CONSULTANTS

The TELLING® Engineering Consultant [TEC] group provides quoted professional fully licensed full-service engineering and technical consultation to contractors, architects and structural engineers nationwide.

The Telling® Engineering Consultant [TEC] group offers quoted services including:

- Shop drawings and calculations for curtain (non-load bearing) and full load-bearing designs
- Preliminary sizing
- Pre-bid engineering pricing
- FREE technical assistance including LEED compliance with Telling's products.

## ENGINEERING AND DESIGN SERVICES (QUOTED) & TECHNICAL SERVICES (FREE)

technical@tellingindustries.com

1-866-372-6384

440-478-8625 (direct)

## ENGINEERING - RECOMMENDED FIRMS

### PREFERRED ENGINEERING FIRM

#### RAZ TECH, INC.

**Web:** [www.raztechinc.com](http://www.raztechinc.com)

**Email:** rzadeh@raztechinc.com

**Office:** 678.878.3748

**Cell:** 404.665.7506

**Address:** RAZ Tech, Inc.

419 E. Crossville Road, Suite 108  
Roswell, GA 30075

### DEVCO ENGINEERING INC.

**Web:** [www.devcoengineering.com](http://www.devcoengineering.com)

**E-Mail:** administrator@devcoengineering.com

**Phone:** 541.757.8991

**Fax:** 541.757.9885

**Address:** DEVCO Engineering, Inc.

245 NE Conifer, P.O. Box 1211

Corvallis, OR 97339

### EXCEL ENGINEERING

**Web:** [www.excelengineer.com](http://www.excelengineer.com)

**E-Mail:** info@excelengineer.com


**Phone:** 920.926.9800

**Fax:** 920.926.9801

**Address:** 100 Camelot Drive

Fond du Lac, WI 54935



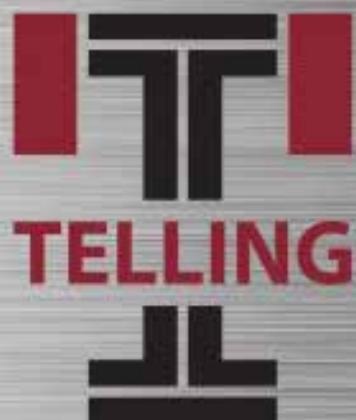

Telling<sup>®</sup> Industries  
Corporate Headquarters  
4420 Sherwin Road  
Willaughby, OH 44094  
Phone: 440-974-3370  
Toll Free: 866-FRAME-TI(372-6384)  
Fax: 440-974-3408  
E-mail: sales.corp@tellingindustries.com

Telling<sup>®</sup> Industries  
Midwest Facility  
2105 Lorrick Road  
Cambridge, OH 43725  
Phone: 740-435-8900  
Toll Free: 866-355TUDS (357-8837)  
Fax: 740-435-8915  
E-mail: sales.oh@tellingindustries.com

Telling<sup>®</sup> Industries  
MidSouth Facility  
1400 Southwire Drive  
Oscoda, AR 72370  
Phone: 870-563-6065  
Toll Free: 888-711-3124  
Fax: 870-563-2471  
E-mail: sales.ar@tellingindustries.com

Telling<sup>®</sup> Industries  
Northeast Facility  
1050 Kennedy Road  
Windsor, CT 06095  
Toll Free: 866-372-6384  
Fax: 440-974-3408  
E-mail: sales.corp@tellingindustries.com

For more information, please contact Telling Industries at 1-866-372-6384  
This technical information reflects the most current information available and supersedes any and all previous publications.  
Effective January 1, 2016.

Updated 11-2-23